

STRIP LED



LX-ST-D560RGBW-24V-12mm

IP	CRI	DC24V
20/55/65	>80	




STRIP LED

RGB colorful strip

Widely adaptable to all types of controllers, Self-encapsulated design

High quality FPC, high thermal 3M adhesive

Ta: -25~40°C ; Tc : 75°C (max)

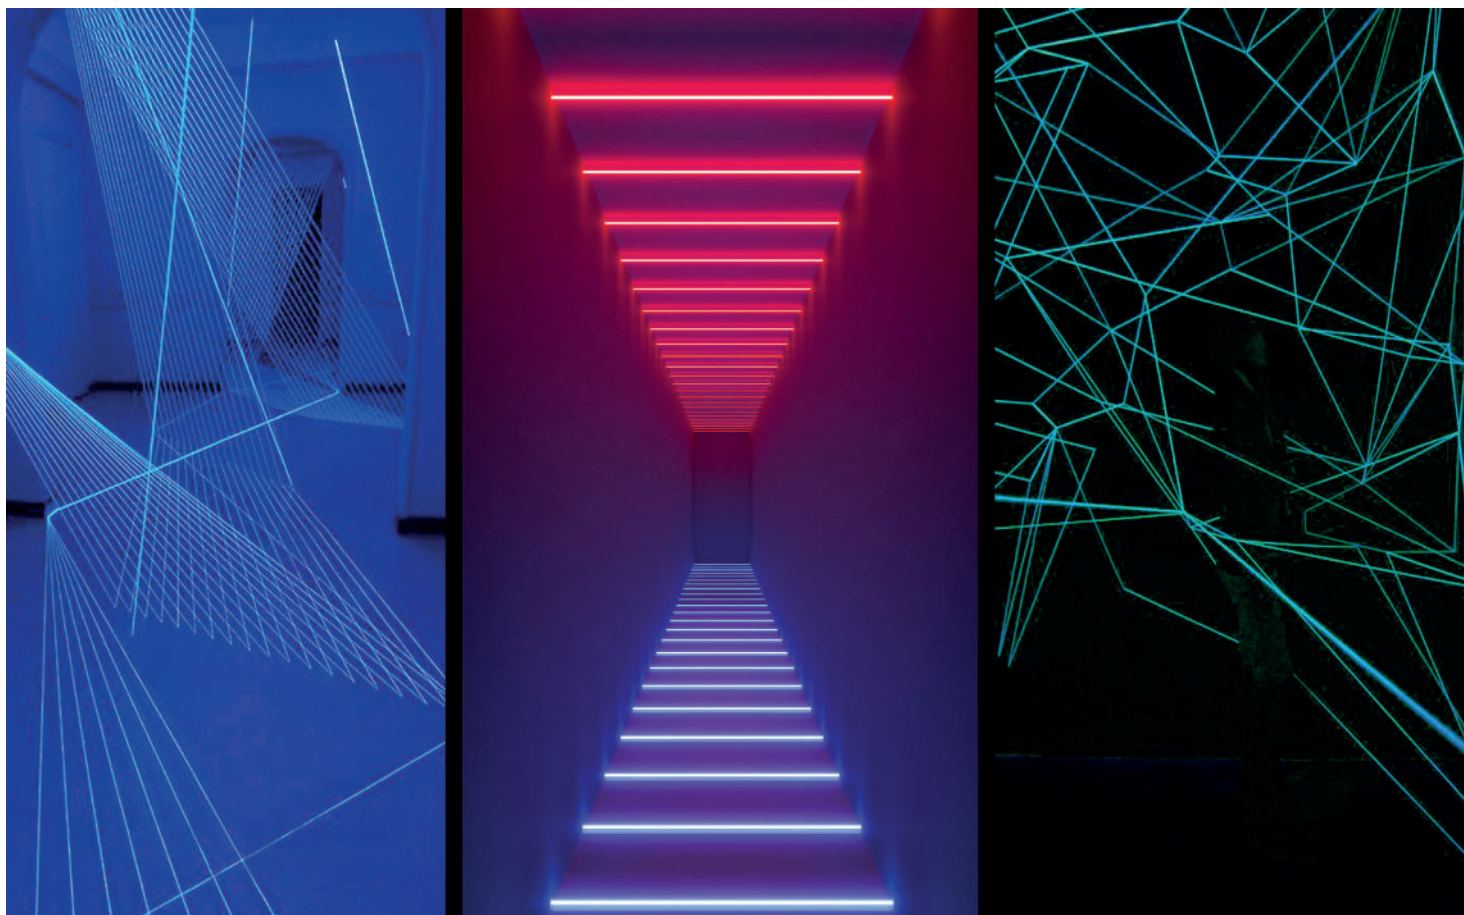

luxio
L I G H T I N G

www.luxio-lighting.com

References

Reference	Led Power	Max Power	Luminous flux	CCT/K	IP Rating	Dimensions
LX-ST-D560RGBW -24V-12mm	16.8W(1m) 69.84W(5m)	19.2W(1m)	344Lm	6000K	IP20/IP55/IP65	5000×12×2.1mm
			87Lm	Red		
			207Lm	Green		
			67Lm	Blue		
			703Lm	RGB		

Accessories Information

Name	Picture	Code	Description
Connector for wire and FPC		LX-94-03-00-0039	12mm width, 5PIN connector of wire and FPC,suitable for RGBW strip, NO/NA, 5PIN wire 18-22AWG
Connector for FPC and FPC		LX-94-03-00-0043	12mm width, 5PIN connector of FPC and FPC, suitable for RGBW strip, NO/NA
Fixed Clip		LX-94-02-00-0019	Fixed clip, transparent, 3*8mm self-tapping screws, suitable for 12mm FPC,NO/NA LED strip
Silicone clip		LX-94-02-00-0004	Silicone clip, screw: PA 3*8mm, suitable for 12mmFPC, ET strip
Silicone end cap set		LX-94-02-00-0023	including end cap and plug,suitable for 12mm FPC,EH/ET/EF silicone extrusion strip
Mounting clip		LX-94-02-00-0026	Transparent PVC mounting groove size:1000*16.2*9.5mm,suitable for 12mm FPC silicone extruded ET/EF strip
Stopper glue		LX-94-16-03010001	Silicone gel,suitable for ST/ET/EH/EF/SF waterproof LED strip
RGBW set		LX-23-01-00-0047	M4+M4-5A Input voltage : 12-24VDC Maximum loaded current : 5A*4CH Max 20A Maximum loaded power : 240W/480W (12V/24V)

Dimensions

