

STRIP LED



LX-ST-DS560RGB-12V-10mm

IP	CRI	DC12V
20/65	80	



STRIP LED


RGB colorful strip

LED built into IC, and IC has break point transmission function

controllers which support UCS19**, UCS29**, TM18**, SM167**, WS28**, GS82**, SK6812, DM613P are recommended.

Ta: -20~40° C ; Tc=75° (max)

Mounting : 3M tape

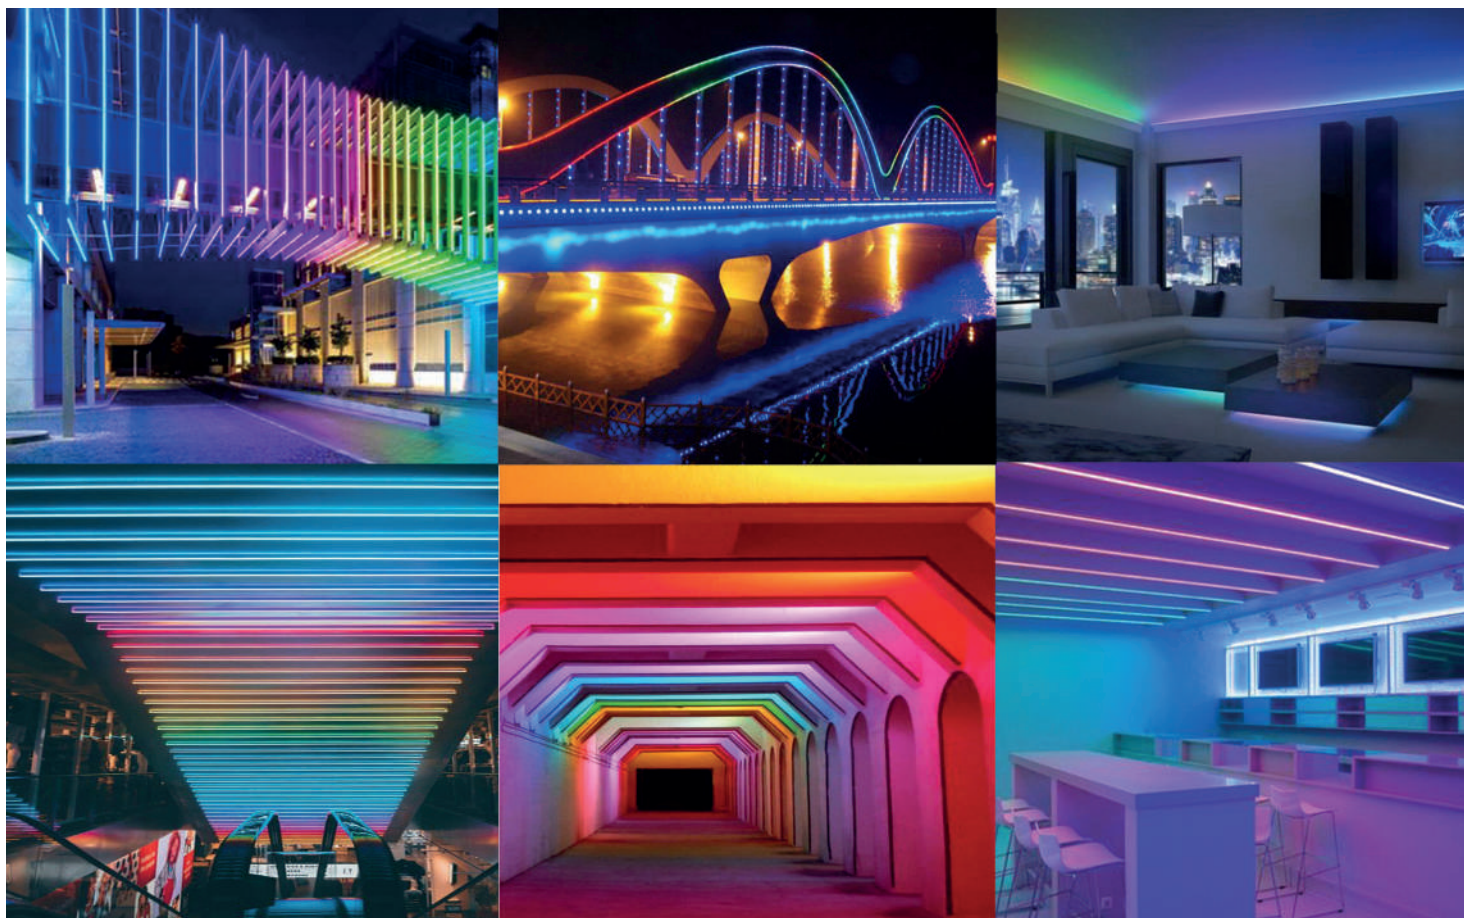

luxio
L I G H T I N G

www.luxio-lighting.com

References

Reference	Led Power	Max Power	Luminous flux	CCT/K	IP Rating	Dimensions
LX-ST-DS560RGB-12V-10mm	8.4W(1m) /38.4W(5m)	9.3W	207Lm	RGB	IP20/IP65	5000×10×2.1mm

Accessories Information

Name	Picture	Code	Description
Fixed Clip		LX-94-02-00 0018	10mm width IP20
Controller		LX-23-01-00-0048	Suit for SPI and DMX strip With 1 port 1024 pixels for SPI 512 pixels for DMX
Controller		LX-23-01-00-0049	Suit for SPI and DMX strip With 4 ports 4*1024pixels for SPI 4*512 pixels for DMX
Controller		LX-23-01-00-0050	Suit for SPI and DMX strip With 8 ports 8*1024pixels for SPI 8*512 pixels for DMX

Dimensions

