


DOWNLIGHT

MAGNETIC SPOTLIGHT



MAGNETIC SPOTLIGHT

Magnetic suction installation. Small and exquisite in appearance. It can be rotated 350° horizontally and 90° vertically, which is better match with its delicate design.

Tunable White allows the colour temperature to be continuously adjusted from warm light to cool light.

Applications : Showrooms, Restaurants, Star-rated Hotels, Villas, Residential buildings, etc.

Physical : Aluminum

Colour(housing) : black

Colour(reflector) : Black

Colour temperature : 2700K, 3000K, 4000K, 5000K




References

Reference	Led Power	Luminous flux	CCT/K	OPTICS	IP Rating	Dimensions		
LX-DL-G351	5W	352-378lm	2700K	15°/24°/33°	IP20	(Ø35*80mm)/ (250*24*37mm)		
		375-381lm	3000K					
LX-DL-G353	2*5W	695-730lm	2700K					
		699-732lm	3000K					
LX-DL-G358	7W	401-452lm	2700K					
		446-469lm	3000K					
LX-DL-G3510	7W	401-452lm	2700K					
		446-469lm	3000K					
LX-DL-G501	12W	802-825lm	2700K			15°/24°/38°	IP20	(Ø50*130mm)/ (250*24*37mm)
		821-864lm	3000K					
LX-DL-G352	5W	109-136lm	2700K			12~36°	IP20	(Ø35*80mm)/ (250*24*37mm)
		119-141lm	3000K					
LX-DL-G354	2*5W	218-272lm	2700K					
		238-282lm	3000K					
LX-DL-G357	7W	118-135lm	2700K					
		125-143lm	3000K					
LX-DL-G359	7W	118-135lm	2700K					
		125-143lm	3000K					
LX-DL-G356	7W	118-135lm	2700K					
		125-143lm	3000K					


Order code : Reference - Power - Luminous flux - CCT/K - Optic

Important : All the specification can be customized as per the project request .


Features

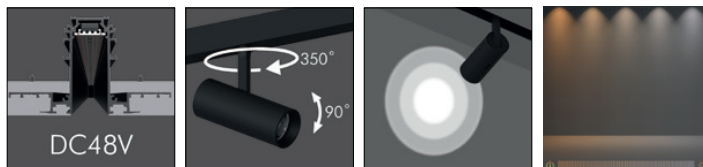


Dimensions




LX-DL-G351




LX-DL-G353





LX-DL-G3510





LX-DL-G358




LX-DL-G501




LX-DL-G352




LX-DL-G354



LX-DL-G359



LX-DL-G357



LX-DL-G356