

MAGNETIC TRACK LIGHT




LX-DL-M20FP

IP 20	CRI >90	SDCM <3 Step	DC48V
-----------------	-------------------	------------------------	--------------

		CASAMBI
--	--	----------------

	CE	RoHS	50000h
--	-----------	-------------	---------------

- Material: AL6063-T5, spraying surface
- Coating: Black (RAL9005)
- Length: 300mm/600mm/900mm optional
- CCT: 2700/3000/3500/4000K optional
- Light efficiency: 70 lm/W
- Lighting direction: downward
- Application: Indoor

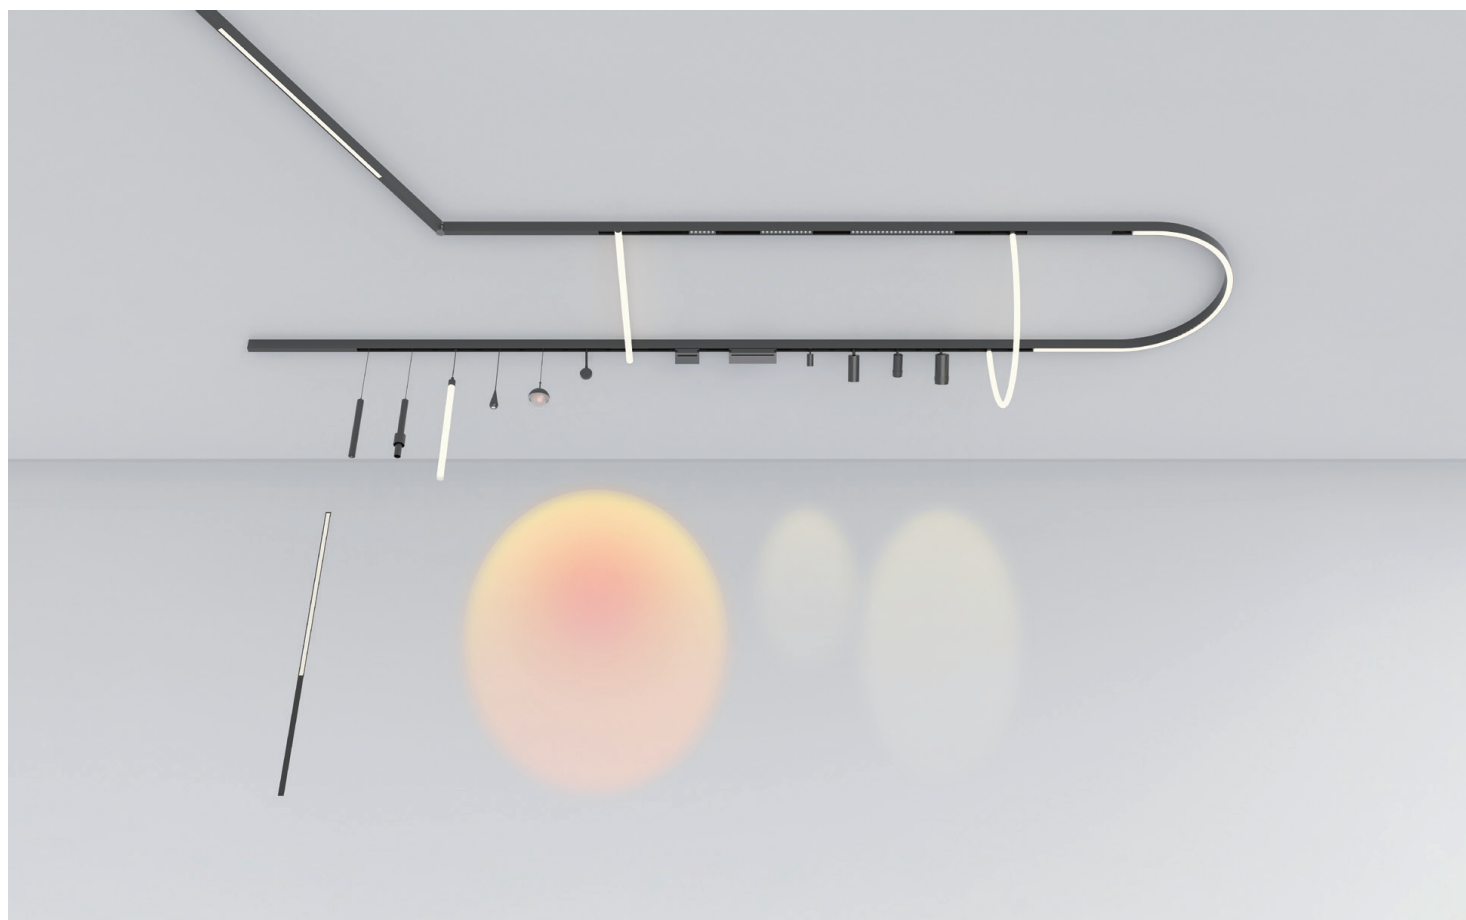

luxio
L I G H T I N G

www.luxio-lighting.com

References

Reference	Input Voltage	Type Power	Max Power	Luminous flux	CRI	CCT/K	Beam Angle	IP Rating	Length
LX-DL-M20FP	48VDC	7W	7.7W	480lm	>90	2700K	65°x90°	IP20	300mm
				490lm		3000K			
				500lm		3500K			
				525lm		4000K			
		14W	15.4W	960lm		2700K			600mm
				980lm		3000K			
				1005lm		3500K			
				1050lm		4000K			
		20W	22W	1370lm		2700K			900mm
				1395lm		3000K			
				1435lm		3500K			
				1500lm		4000K			

1. The output data is based on the testing result of Ra90,4000k luminaires;
2. The tolerance of output data can be vary up to 10%;
3. The output data is typical value.

Dimensions

