

# MAGNETIC TRACK LIGHT




LX-DL-M20S-62

<b>IP</b> 20	<b>CRI</b> >90	<b>SDCM</b> <3 Step	<b>DC48V</b>
-----------------	-------------------	------------------------	--------------

		<b>CASAMBI</b>
--	--	----------------

	<b>CE</b>	<b>RoHS</b>	<b>50000h</b>
--	-----------	-------------	---------------

- Material : AL6063-T5, spraying surface
- Coating : Black (RAL9005)
- Size: Ø30mm optional
- CCT: 2700/3000/3500/4000K optional
- Light efficiency: 82/77/85 lm/W
- Application: Indoor

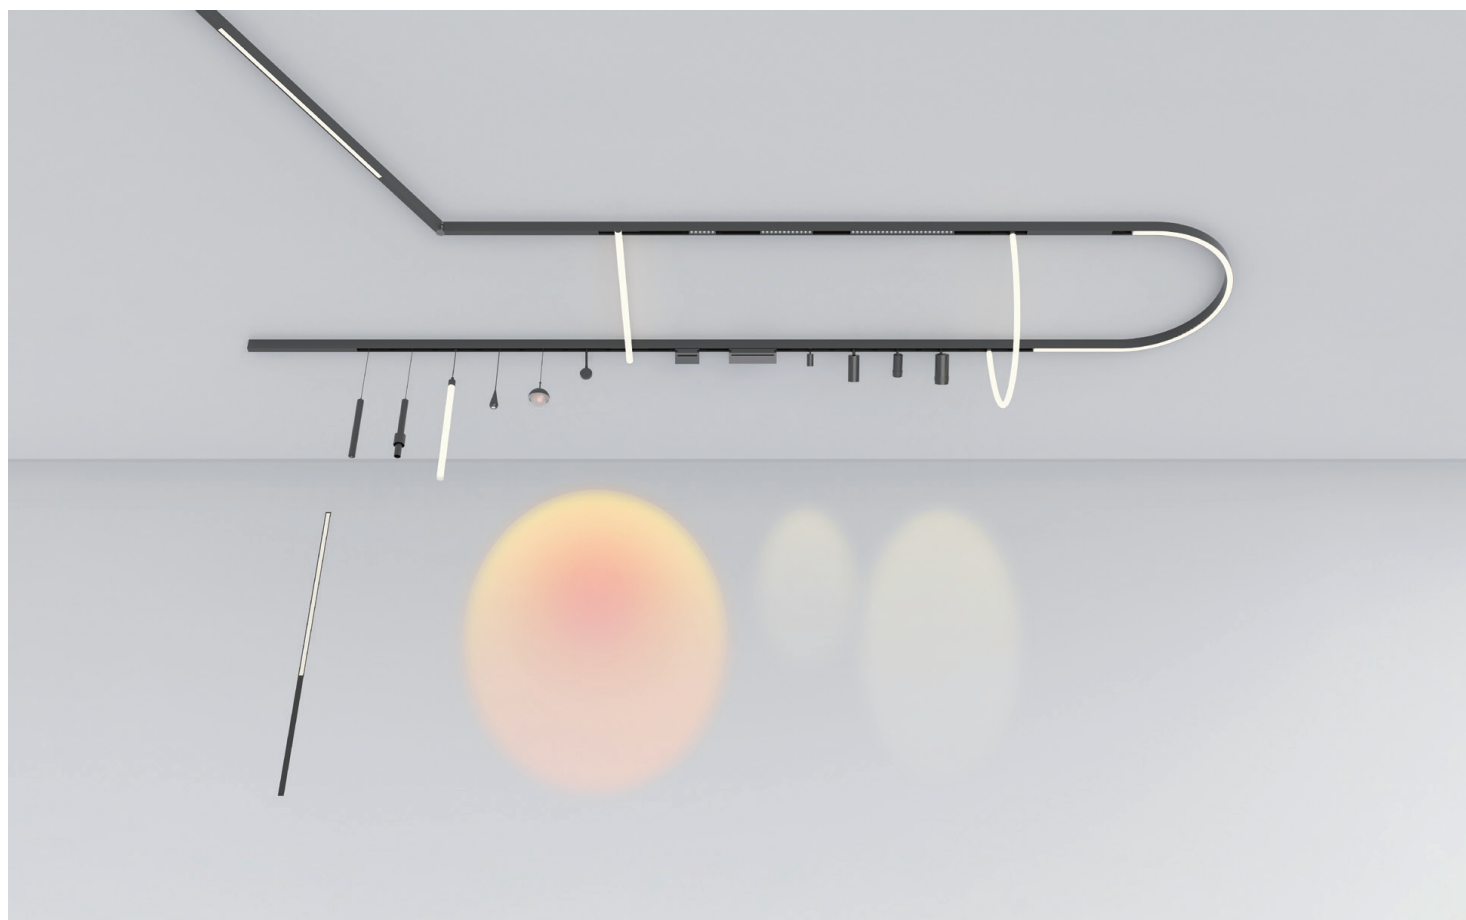

**luxio**  
L I G H T I N G

[www.luxio-lighting.com](http://www.luxio-lighting.com)

## References

Reference	Input Voltage	Type Power	Max Power	Luminous flux	CRI	CCT/K	Beam Angle	IP Rating	Size
LX-DL-M20S-62	48VDC	15W	16.5W	1125lm	>90	2700K	15°	IP20	62mm
				1160lm		3000K			
				1195lm		3500K			
				1230lm		4000K			
				1045lm		2700K	24°		
				1080lm		3000K			
				1120lm		3500K			
				1155lm		4000K	36°		
				1165lm		2700K			
				1200lm		3000K			
				1240lm		3500K			
				1275lm		4000K			

1. The output data is based on the testing result of Ra90,4000k luminaires;
2. The tolerance of output data can be vary up to 10%;
3. The output data is typical value.

## Dimensions

