# **PROFIL LIGHT**



#### LX-PL-LS0709












#### LX-PL-LS0709

Special local auxiliary lighting system, can be widely used in various interior decoration scenarios and local light spaces. A touch of auxiliary decorative lighting in addition to the basic lighting creates different atmospheres and visual enjoyment.

Embellish life with light that follows you whenever you go.


- 1, "Dots-free" lighting: Perfect homogenous lighting.
- 2, Various diffuser options: Several options of diffusers, In various shapes and light distribution plans Complete with everything needed
- 3, "Two" end caps : Two options of end cap for two ways of wire outgoing, Close-fitting design without screws makes installation much easier
- 4, Various installation methods : A wide range of installation accessories wider applications
- 5, "One" cut: Consistent length between diffuser and profile
- 6, Smart control for unlimited possibilities: Perfectly match the profiles like customized, Control by hand sweep or touching.

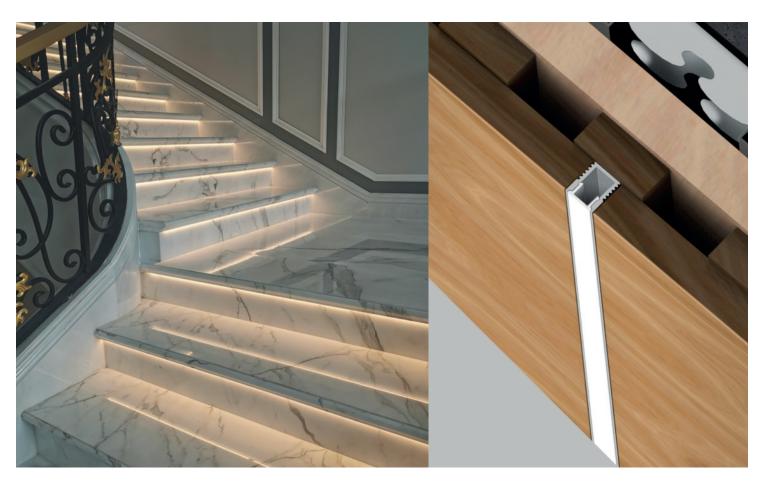



www.luxio-lighting.com

#### Details

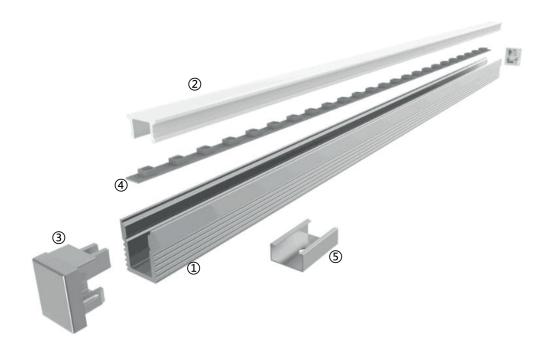

### **Standard Configuration**

Picture	Item	Parameter	Model
	①Profile	Material: AL6063-T5 Profile weight: 0.187kg/2.5m Size: L2500*W7.6*H9mm Surface processing: Silver alkali sand oxidation film	/
	②Cover	Type: Frosted diffuser Material: PC Light transmittance: 55% Size: L2500*W6.4*H3.7mm (shrink) 0.8mm/m when the temperature rises (drops) 10°C.	/
<b>₩</b>	③End caps	Size: L9*W7.6*H8mm	LX-EC-EC-LS0709



### **Optional Accessories**

Picture	ltem	Parameter	Model
	② Black Cover	Type: Black diffuser Material: PC Light transmittance: 15% Size: L2500*W6.4*H3.7mm (shrink) 0.8mm/m when the temperature rises (drops) 10°C.	LX-CV-M-LR0812
and the little l	<b>4</b> FPC strip	Material: FPC, CCT: 2700/3000/4000/6000K; Ra>90; Voltage:24V; Power: 6.6W/m; Lumen: 710Lm/m; PCB width: 4mm; Minimum cut: 50mm;	LX-ST-D6140-24V-4mm
	⑤ Recessed clips	Size: L15*W9.7*H4.5mm	LX-CP-03

#### **Fixings**



## Dimensions

