

# PROFIL LIGHT




LX-PL-AH5060-15A45&90

24V	CRI >80/95	PF >0.9	IP 20
-----	---------------	------------	----------



## LX-PL-AH5060-15A45&90

- Lighting direction : Lighting upward and downward
- Various installation ways: pendant, surface mounted
- Specially designed light source with diffusers producing homogeneous and soft lighting
- Ever-changing shapes generated by means of super free application and connections of lines and arcs
- Flexible diffuser making it easy for installation without connections for over length application and light leakage
- AL6063-T5 aluminum profile with high-quality surface treatment and three optional colors of black, white and silver

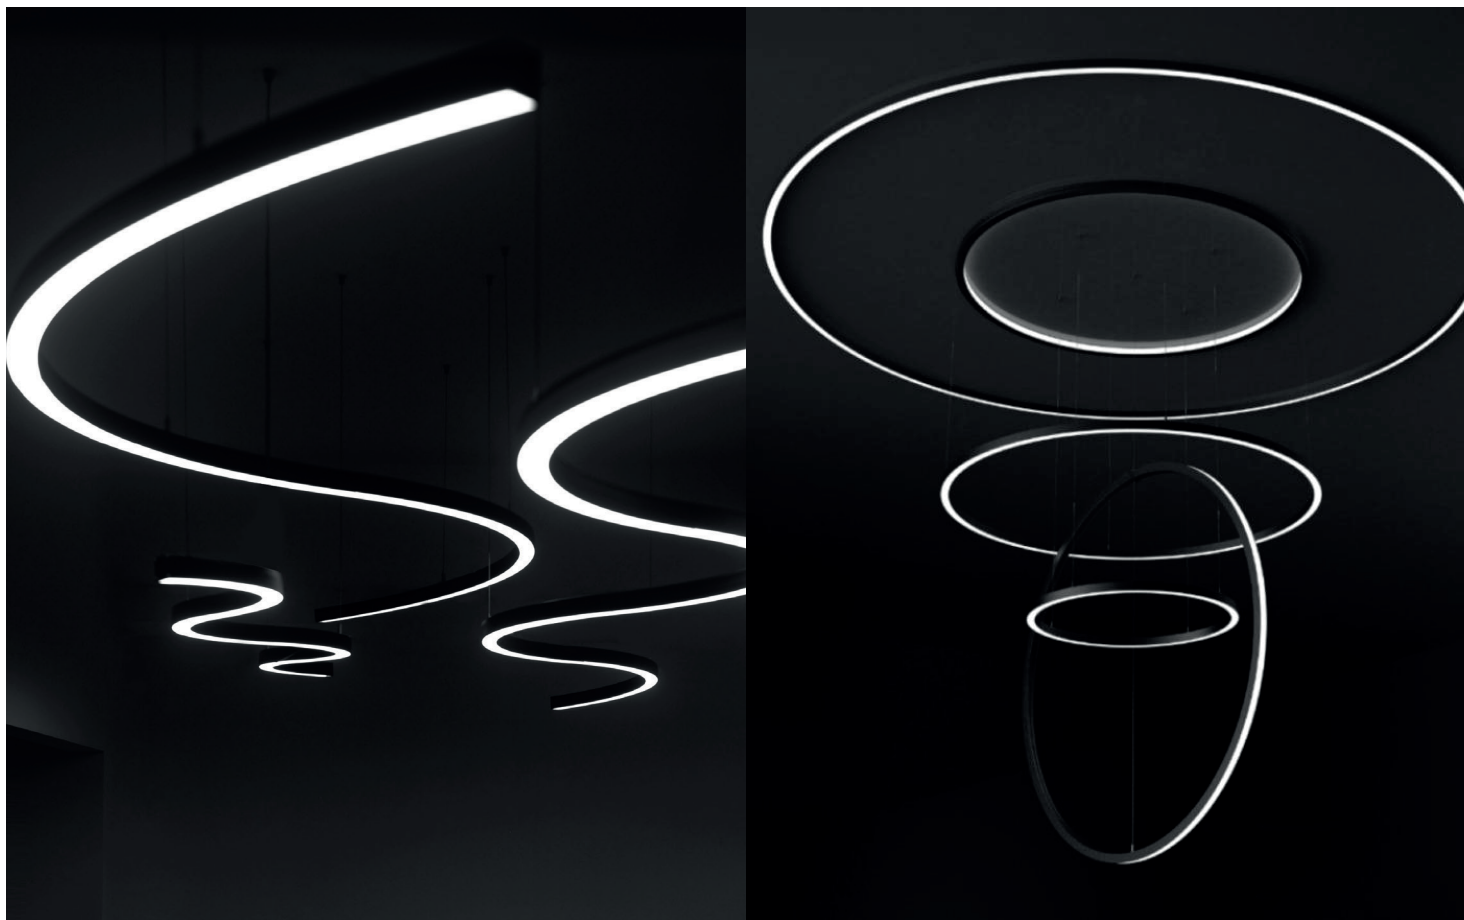






**luxio**  
L I G H T I N G

[www.luxio-lighting.com](http://www.luxio-lighting.com)





## Details



## Optional Accessories

Picture	Item	Parameter	Parameter
	① Profile	Profile weight : 0.7kg / D1500mm, 45° Size : 50x60mm, D1500mm, 45 50x60mm, D1500mm, 90° Material : AL6063-T5 Surface processing: Spray	LX-PL-AH5060-15A45/ 90
	②/③ Cover	②35 cover Size : L20000*W32*H3.5mm ③50 cover Size : L20000*W47*H4mm Light transmittance: 60%	②LX-CV-AS3535FD ③LX-CV-AH5060FD
	④ End cap	Size : L60*W50*H2mm	LX-EC-AH5060
	Rigid modular	Material:AL,CCT: 2700/3000/3500/4000/5000/6500K ; CRI>80/90 ; Voltage : 24V ; Power : 11.6W/pcs ; Lumen : 1740Lm/m ; Width : 20mm ; Minimum cutting unit : 16LEDs ;	LX-ST-DY8160-24V-20mm-15A45
	Screw set	Size : M3.5*50mm	LX-CL-15

## Optional Accessories

Picture	Item	Parameter	Parameter
	Pendant cable	Steel cable: D1.5*2000\4000mm\maximum load bearing:13Kg	LX-PN-W
	Pendant cable	/	LX-PE-C
	Splicing bar	Size: L25*W32*H8.5mm	LX-EX-25
	Pendant clips	Size: L39.5*W20*H12mm	LX-CP-29

## Fixings



## Dimensions

