

# PROFIL LIGHT




LX-PL-AS3535-03A90

|     |               |            |          |
|-----|---------------|------------|----------|
| 24V | CRI<br>>80/95 | PF<br>>0.9 | IP<br>20 |
|-----|---------------|------------|----------|



## LX-PL-AS3535-03A90

- Various installation ways: pendant, recessed and surface mounted
- Ever-changing shapes generated by means of super free application and connections of lines and arcs
- Flexible diffuser making it easy for installation without connections for over length application and light leakage
- Specially designed light source with diffusers producing homogeneous and soft lighting
- AL6063-T5 aluminum profile with high-quality surface treatment and three optional colors of black, white and silver

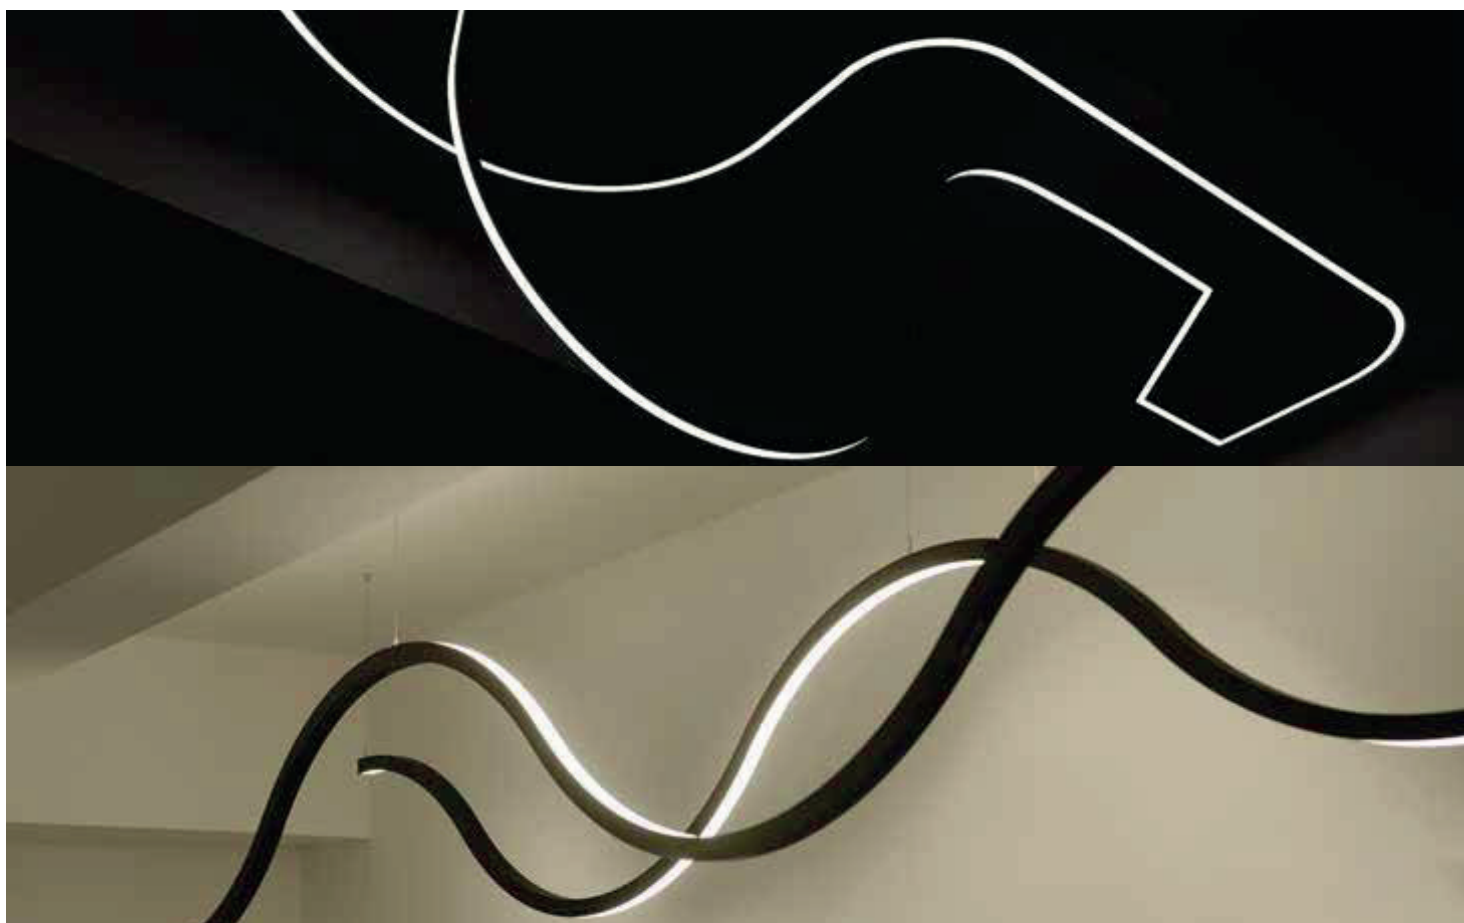

**luxio**  
L I G H T I N G

[www.luxio-lighting.com](http://www.luxio-lighting.com)





## Details



## Optional Accessories

| Picture   | Item            | Parameter   | Parameter                       |
|---|-----------------|---|---------------------------------|
|  | ① Profile       | Material : AL6063-T5<br>Profile weight : 0.24kg/ D320mm, 90°<br>Size : 35x35mm, D320mm, 90°<br>Surface processing: Spray  | LX-PL-AS3535-03A90              |
|  | ② Cover         | Size : L20000*W32*H3.5mm<br>Light transmittance: 55%  | LX-CV-AS3535FD                  |
|  | ③ End cap       | Size : L35*W35*H1.5mm   | LX-EC-AS3535                    |
|  | ④ Rigid modular | Material : AL,CCT:2700/3000/3500/4000/5000/6500K<br>; CRI>80/90 ; Voltage : 24V ; Power : 5.4W/pcs ;<br>Lumen : 810Lm/pcs ; Width : 20mm ;<br>Minimum cutting unit : 16LEDs ; | LX-ST-DY8160-24V-<br>20mm-30A90 |
|  | Screw set       | Size : M3.5*40mm  | LX-CL-01                        |

## Optional Accessories

| Picture  | Item                   | Parameter  | Parameter |
|--|------------------------|--|-----------|
|   | Pendant cable          | Steel cable : D1.5*2000\4000mm\maximum load bearing:13Kg | LX-PN-W   |
|   | Pendant cable          | Size:20AWG\2000mm\maximum load bearing:6.5Kg             | LX-PE-K   |
|   | Recessed buckle        | Size : L78*W34*H15mm                                     | LX-RE-13  |
|  | Surface mounted buckle | Size : 33.5*8.5*5.6mm                                    | LX-CL-05  |

## Fixings



## Dimensions

