

# PROFIL LIGHT



## LX-PL-LE1910

24V	CRI >80/95	PF >0.9	IP 20
-----	---------------	------------	----------



### LX-PL-LE1910

- Material : AL6063-T5,spraying surface/anodizing
- Coating : Silver anodized(RAL9006),Black(RAL9005), White(RAL9003)
- Length : 2500mm/0-2500mm customizable (Other lengths on request)
- Application: Indoor
- Installation : Ceiling、 Trimless recessed



## Luminaire Parameters

Version	Model	Length	Input Voltage (V)	Max. Current (A/m)	Type Power (W/m)	Max. Power (W/m)	CRI	CCT	Lumen (LM/m)
Regular	LX-PL-LE1910	1000mm (3.28ft)	24	0.29 (0.09A/ft)	7 (2.13 W/ft)	7 (2.13W/ft)	>90	2700K	370 (110LM/ft)
								3000K	380 (115LM/ft)
								4000K	400 (120LM/ft)
								6000K	380 (115LM/ft)


Note:

1. The above parameters were tested based on 1M standard products and LX-ST-D6140-24V-8mm light source ;
2. luminous flux is allowed to have a  $\pm 10\%$  error range;
3. The above parameters are typical values.













## Fixings



## Dimensions




## Accessories Information

Picture	Section size	Name	Description	Model
		Profile	Material : AL6063-T5 Surface processing : Anodizing Size : L2500*W19*H10mm [Inch size:L98.43"*W0.75"*H0.39"]	LX-PR-LE1910
		Diffuser	Material : PC Light transmittance : >75% Size : L2500*W14.43*H3mm [Inch size:L98.43"*W0.57"*H0.12"] PC feature : The diffuser will extend (shrink) 0.8mm/m when the temperature raises (drops) 10°C.	LX-CV-LE1910
		Black Prismatic	Material : PC Light transmittance : >10% Size : L2500*W14.43*H3mm [Inch size:L98.43"*W0.57"*H0.12"] PC feature : The diffuser will extend (shrink) 0.8mm/m when the temperature raises (drops) 10°C.	LX-CV-LS1510
		Holeless end cap	Size : L19*W10*H8mm [Inch size:L0.75"*W0.39"*H0.31"]	LX-EC-LE1910
		End cap with hole	Size : L19*W10*H8mm [Inch size:L0.75"*W0.39"*H0.31"] Hole size:4.5*2.5mm [Hole inch size:0.18"*0.1"]	LX-EC-LE1910
		FPC strip	Material : FPC CCT : 2700/3000/4000/6000K ; CRI>90 ; Voltage : 24V ; Power : 6.6W/m ; Lumen : 710Lm/m ; Width : 8mm ; Minimum cutting unit : 50mm ;	LX-ST-D6140-24V-8mm

## Product mechanical data

### · Straight wire outlet

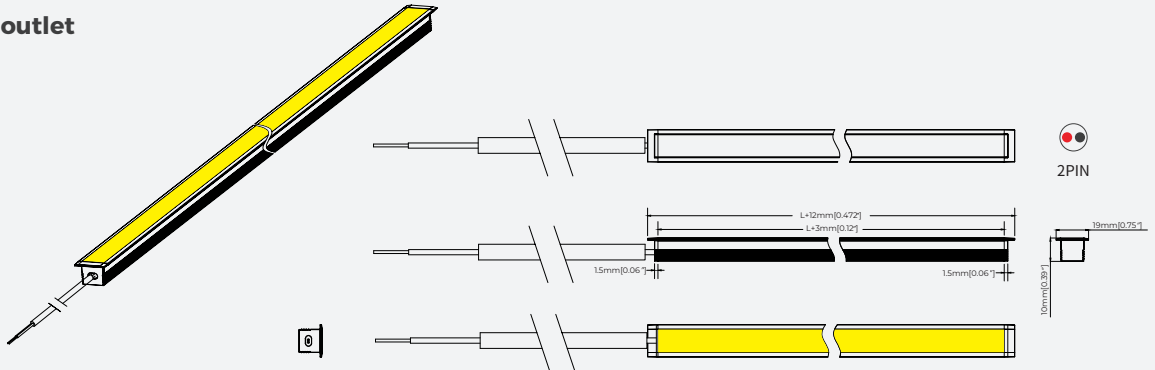

### · Bottom wire outlet

