

# PROFIL LIGHT



## LX-PL-LE2409

24V	CRI >80/95	PF >0.9	IP 20
-----	---------------	------------	----------



### LX-PL-LE2409


Special local auxiliary lighting system, can be widely used in various interior decoration scenarios and local light spaces. A touch of auxiliary decorative lighting in addition to the basic lighting creates different atmospheres and visual enjoyment.

Embellish life with light that follows you whenever you go.

- 1, "Dots-free" lighting : Perfect homogenous lighting.
- 2, Various diffuser options : Several options of diffusers, In various shapes and light distribution plans Complete with everything needed
- 3, "Two" end caps : Two options of end cap for two ways of wire outgoing, Close-fitting design without screws makes installation much easier
- 4, Various installation methods : A wide range of installation accessories wider applications
- 5, "One" cut : Consistent length between diffuser and profile
- 6, Smart control for unlimited possibilities : Perfectly match the profiles like customized, Control by hand sweep or touching.




## Details

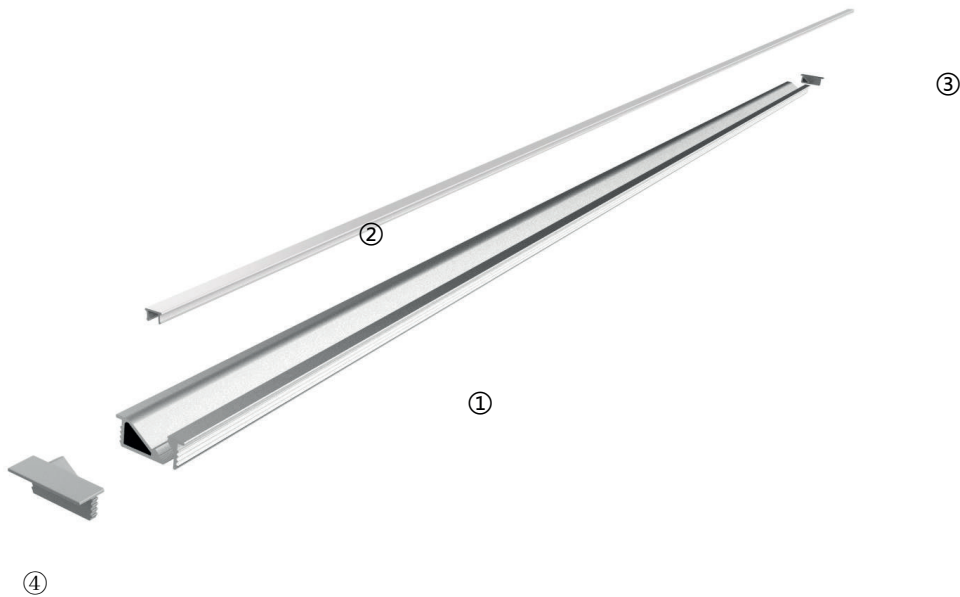

## Standard Configuration

Picture	Item	Parameter	Model
	① Profile	Material: AL6063-T5 Profile weight: 0.45kg/2.5m Size: L2500*W23.8*H8.8mm Surface processing: Silver alkali sand oxidation film	/
	② Cover	Type: Frosted diffuse Material: PC Light transmittance : 60% Size : L2500*W6.4*H3.7mm (shrink) 0.8mm/m when the temperature rises (drops) 10°C.	/
	③ End caps	Size : L23.8*W14*H8.8mm	LX-EC-LE2409
	④ End cap with hole	Size : L23.8*W14*H8.8mm	LX-EC-LE2409

## Optional Accessories

Picture	Item	Parameter	Model
	Flexible strip	Material : FPC,CCT : 2700/3000/4000/6000K ; CRI >90 ; Voltage : 24V ; Power : 6.6W/m ; Lumen : 710Lm/m ; Width : 4mm ; Minimum cutting unit : 7LEDs/50mm ;	LX-ST-D6140-24V-4mm

## Fixings



## Dimensions

