

PROFIL LIGHT

LX-PL-LE2507



24V	CRI >80/95	PF >0.9	IP 20
-----	----------------------	-------------------	-----------------



LX-PL-LE2507


Special local auxiliary lighting system, can be widely used in various interior decoration scenarios and local light spaces. A touch of auxiliary decorative lighting in addition to the basic lighting creates different atmospheres and visual enjoyment.

Embellish life with light that follows you whenever you go.




- 1, "Dots-free" lighting : Perfect homogenous lighting.
- 2, Various diffuser options : Several options of diffusers, In various shapes and light distribution plans Complete with everything needed
- 3, "Two" end caps : Two options of end cap for two ways of wire outgoing, Close-fitting design without screws makes installation much easier
- 4, Various installation methods : A wide range of installation accessories wider applications
- 5, "One" cut : Consistent length between diffuser and profile
- 6, Smart control for unlimited possibilities : Perfectly match the profiles like customized, Control by hand sweep or touching.



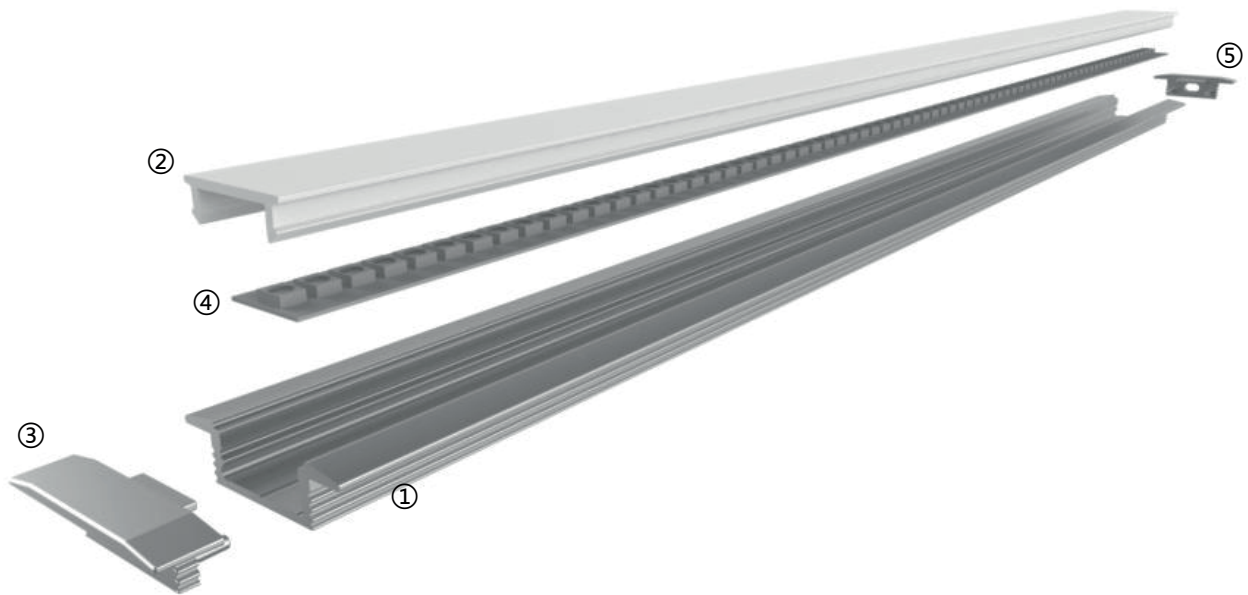



Details



Standard Configuration

Picture	Item	Parameter	Model
	①Profile	Material: AL6063-T5 Profile weight:0.29kg/2.5m Size: L2500*W25*H7mm Surface processing: Anodizing	/
	②Cover	Type: Frosted diffuse Material: PC Light transmittance: 60% Size: L2500*W14.7*H4.5mm (shrink) 0.8mm/m when the temperature rises (drops) 10°C.	/
	③End caps	Size: L25*W7*H10mm	LX-EC-LE2507

Optional Accessories

Picture	Item	Parameter	Model
	②Microprism diffuser	Type: Microprism diffuser Material: PC Light transmittance: 50% Size: L2500*W14.6*H4.3mm (shrink) 0.8mm/m when the temperature rises (drops) 10°C.	LX-CV-LR1613
	②Black Microprism	Type: Black Microprism Material: PC Light transmittance: 10% Size: L2500*W14.6*H4.3mm (shrink) 0.8mm/m when the temperature rises (drops) 10°C.	LX-CV-LR1613
	④FPC strip LX-ST-D6280-24V-8mm	Material: FPC, CCT: 2700/3000/4000/6000K; Ra > 90; Voltage:24V; Power: 15W/m; Lumen: 1650Lm/m; PCB width: 8mm; Minimum cut: 25mm;	LX-ST-D6280-24V-8mm
	⑤End caps	Size: L25*W7*H10mm	LX-EC-LE2507

Fixings



Dimensions

