

STRIP LED



LX-ST-D8192-24V-15mm

IP 20/65	CRI >80/90/95	DC24V
--------------------	-------------------------	--------------



- Luminance efficiency up to 155LM/W
- Self-encapsulated design offers eight optional 1900-6000K white lights
- With life span over 60000H
- Ta: -25~40°C ; Tc : 75°C (max)
- Rated current : 0.67A(1m) /2.7A(5m)
- On-off times: 10000 (test times)
- Max.length : 5000mm(16.4')
- Cutting unit : 8leds/41.67mm(1.64")
- Min. bend diameter : Φ 60mm(2.36")
- Mounting : 3M tape
- Copper foil: 3oz

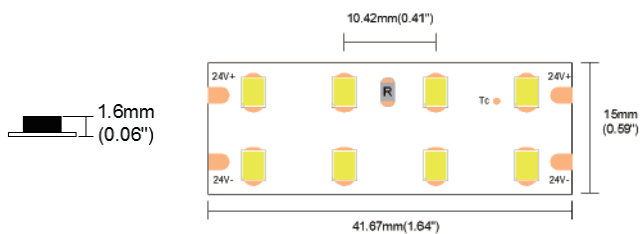


References




Reference	Typical Power	Max Power	Luminous flux/m	CRI	CCT/K	IP Rating	Dimensions
LX-ST-D8192-24V-15mm	18.9W(1m) /64.8W(4m)	20.8W(1m)	2220lm	Ra>80	1900K	IP20/IP65	5000*15*1.6mm
			2470lm		2300K		
			2670lm		2700K		
			2810lm		3000K		
			2855lm		3500K		
			2930lm		4000K		
			2930lm		5000K		
			2810lm		6000K		
			1780lm	Ra>90	1900K		
			1980lm		2300K		
			2140lm		2700K		
			2250lm		3000K		
			2285lm		3500K		
			2345lm		4000K		
			2345lm		5000K		
			2250lm		6000K		
			1760lm	Ra>95	1900K		
			1960lm		2300K		
			2120lm		2700K		
			2230lm		3000K		
			2290lm		3500K		
			2325lm		4000K		
			2325lm		5000K		
			1700lm		Ra>0		
			378lm	B 470nm			

- 1.The tolerance of output data can be vary up to 15%.
- 2.the output data tested according to IES TM-30-15.
- 3.the output data is based on IP20/1 merter, data of 5m in only for reference.
- 4.IP protection process leads changes to size, CCT and luminous flux.

Dimensions



IP process information

Name	Picture	Code	coding	description
Connector for FPC and FPC		81-01-000002-000038	LX-CBB210-NOTA	10MM-2P solder-free connector (board-to board)\ suitable for bare board 10mm width strip light
Connector for wire and FPC		81-01-000002-000039	LX-CXB210-NOTA	10MM-2P solderless connector(wire to board)\ Compatible with 20&22AWG wire\20#(6A);22#(4A)\ Applicable to bare board 10mm width lamp strip
L-connector for FPC and FPC		81-01-000002-000053	LX-CBBL210-NOTA	10MM-2P solderless (L) connectors (board-to board)\ for bare board 10mm width light strip

Electronic & output data

IP Process	Picture	Picture description	Size	Optional CCT/color for finished product	Lumen output rate
NO	 NO/IP20	No proof	15mm*1.6mm	1900K/2300K/2700K/3000K/3500K/ 4000K/5000K/6000K/G/B	100%
NA	 NANO/IP65	Nano-proof	15mm*1.7mm	1900K/2300K/2700K/3000K/3500K/ 4000K/5000K/6000K/G/B	98%

Precautions

- Please drive the led strip with 24VDC isolated power, and the ripple of the constant voltage source should be less than 5%.
- Please do not bend the strip into an arc with a diameter less than 60mm to ensure the longevity and reliability.
- Do not fold it in case any damage of LED beads.
- Do not pull the power wire hard to ensure the longevity. Any Crash may damage the LED light is prohibited.
- Please make sure the wire is connected to the anode and cathode correctly. The power output should be consistent with the voltage of the strip to avoid damage.
- LED lights should be stored in dry, sealed environment. Please only unpack it before usage. Ambient temperature: -250°C~400°C
- Storage temperature: 0°C~600°C. Please use the strips without waterproof within indoor environment with humidity less than 70%.
- Please be careful during operation. Do not touch the AC power supply in case of electric shock.
- Please leave at least 20% power for the power supply during using to ensure there is enough power supply to drive the product.
- Do not use any acid or alkaline adhesives to fix the product (e.g.: glass cement).
- Do not scratch the product when IP process of the product is NA. Ultraviolet rays will damage the nano-layers on the product and seriously affect the life of the product.