


PROFIL LIGHT



LX-PL-LH40G

IP 20	CRI 80/90	SDCM <3 Step	AC220V ~240V	
-----------------	---------------------	------------------------	------------------------	---

	CE	RoHS	50000h
---	-----------	-------------	---------------

- Material : AL6063-T5,spraying surface/anodizing
- Coating : Silver anodized(RAL9006),Black(RAL9005), White(RAL9003)
- Lighting direction: upward&downward
- Light efficiency: 100 LM/W
- Grille angle : 12°/24°/38°/50° optional
- Dimming method: Non/ DALI-2+PUSH/ 1-10V optional
- Length: 1200mm/1500mm/1800mm optional (other length on request)
- CCT: 2700/3000/3500/4000/5000/6500K optional
- Application: Indoor
- Installation method: Pendant



luxio
L I G H T I N G

www.luxio-lighting.com

Luminaire Parameters


Version	Model	Length	Input Voltage (V)	Max. Current (A)	Type Power (W)	Max. Power (W)	CRI	CCT	Lumen (LM)
Normal	LX-PL-LH40G-1200	1200mm	220VAC~ 240VAC	12	42	46	>80	2700K	4010lm
								3000K	4010lm
								3500K	4170lm
								4000K	4330lm
								5000K	4330lm
								6500K	4330lm
							>90	2700K	3370lm
								3000K	3440lm
								3500K	3530lm
								4000K	3690lm
								5000K	3690lm
								6500K	3690lm
Normal	LX-PL-LH40G-1500	1500mm	220VAC~ 240VAC	1.6	56	61	>80	2700K	5350lm
								3000K	5470lm
								3500K	5560lm
								4000K	5770lm
								5000K	5770lm
								6500K	5770lm
							>90	2700K	4500lm
								3000K	4580lm
								3500K	4710lm
								4000K	4920lm
								5000K	4920lm
								6500K	4920lm

Normal	LX-PL-LH40G-1800	1800mm	220VAC~ 240VAC	1.8	63	69	>80	2700K	6010lm
								3000K	6160lm
								3500K	6250lm
								4000K	6490lm
								5000K	6490lm
								6500K	6490lm
							>90	2700K	5060lm
								3000K	5160lm
								3500K	5300lm
								4000K	5540lm
								5000K	5540lm
								6500K	5540lm







Note:

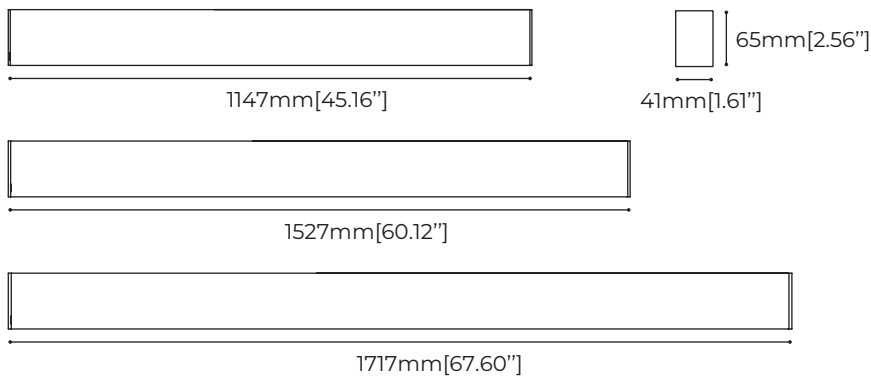1. The above parameters were tested based on 1.2M(3.94') standard products;
2. luminous flux is allowed to have a $\pm 10\%$ error range;
3. The above parameters are typical values.

Dimensions



Accessories Information

Picture	Section size	Name	Description	Model	Note
		pendant clip	Size : L25.8*W20*H8.6mm [Inch size : L1.02''*W0.79''*H0.34'']	LX-CP-32	Installation Accessories
	/	Pendant cable 2m/4m	/	LX-PN-D	
	/	Pendant cable 2m/4m (with junction box)	/	LX-PY-D	
	/	Pendant rod	/	LX-PG-I	
	/	Splicing bar	Size : L120*W19.38*H15.64mm [Inch size : L4.72''*W0.76''*H0.62'']	LX-EX-43	Splicing accessory