

HIGHBAY

LX-HB-02-G18



| | | |
|-----------------|-------------------|-------------------|
| IP 65 | AC110-277V | CRI >80 |
|-----------------|-------------------|-------------------|




HIGHBAY LX-HB-02-G18

Factories, Steel Mills, Steel Smelting Plants, Manufacturing Plants & Warehouses Farms and Industrial Installations, sport Facilities & Workshops, Storage Facilities & Warehouses Supermarkets & Department Stores, Showrooms, Design Centers & Galleries.

Operating Temp.: -40°C ~+50°C

Operating Temp.: -40°C ~+80°C

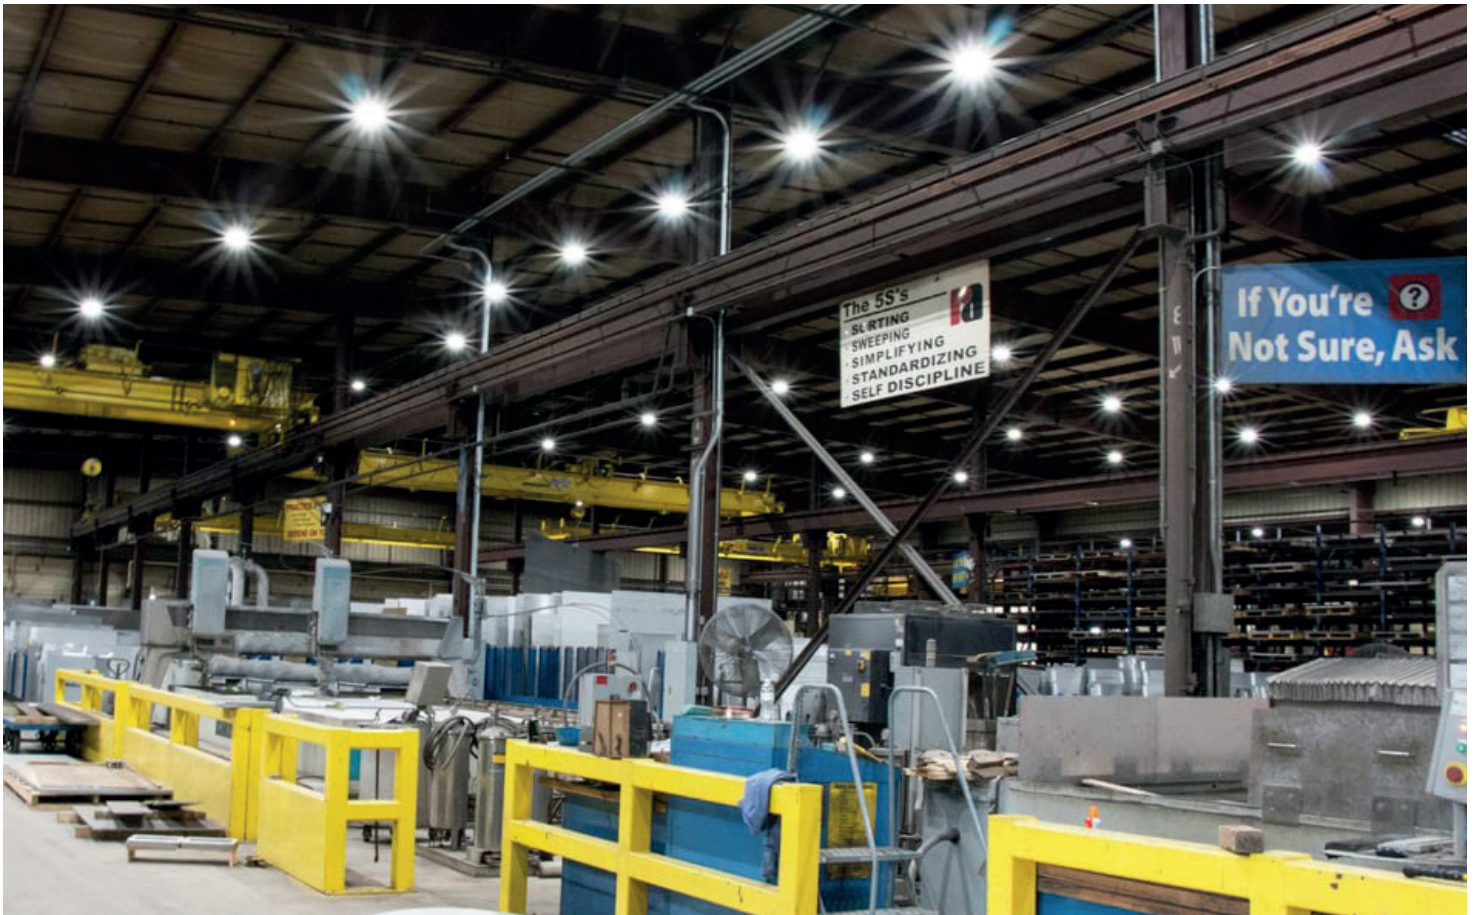

luxio
L I G H T I N G

www.luxio-lighting.com

References

| Reference | Led Power | Luminous flux | CCT/K | OPTICS | IP Rating | Net Weight |
|--------------|-----------|---------------|-----------------------------|--------------|-----------|------------------|
| LX-HB-02-G18 | 80W | 11200lm | 3000K/4000K/5000K/ 5700K | 60°/90°/120° | IP65 | 1.70kg (3.75Lbs) |
| | 100W | 14000lm | | | | |
| | 150W | 21000lm | | | | |
| | 200W | 28000lm | | | | |

Order code : Reference - Power - Luminous flux - CCT/K - Optic

Important : All the specification can be customized as per the project request .

Others optional




P1




P2

Dimensions(mm)

P1

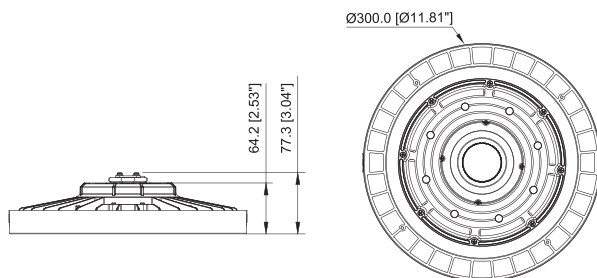

P2

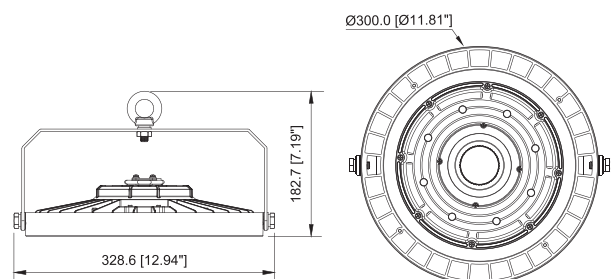

Installation and use

P1 Mounting Ring (Standard)

1

| Power | D1 |
|-------|------|
| 100W | 10mm |
| 150W | 10mm |
| 200W | 10mm |

(Optional)

2

Brown(Black) --- L
 Blue(White) --- N
 Green/Yellow --- GND

L N GND

3

P2 Mounting Bracket

1

| Power | D1 | D2 |
|-------|-------|------|
| 100W | 180mm | 12mm |
| 150W | 180mm | 12mm |
| 200W | 180mm | 12mm |

(Optional)

2

3

Brown(Black) --- L
 Blue(White) --- N
 Green/Yellow --- GND

L N GND