


PROFIL LIGHT

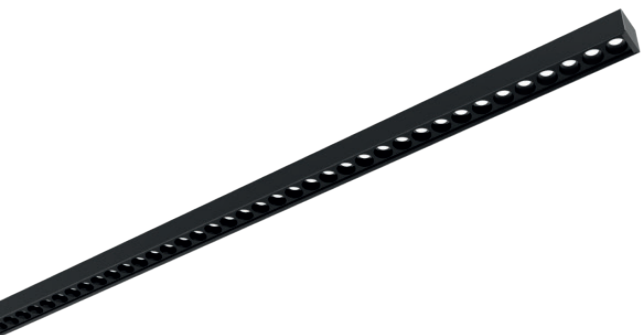

LX-PL-LM25G(A)

IP 20	CRI 80/90	24VDC
-----------------	---------------------	--------------

5 Year Warranty	CE	RoHS	50000h
---------------------------	-----------	-------------	---------------


- 25mm slender lighting surface
- 120 LM/W high light efficiency design, lumen output up to 2375 Lm/m
- Multiple standard corner (L type, X type, T type optional), available for free connection.
- to meet variety application requirements.
- Provide surface mounted buckle, more convenient installation.
- Profile material AL6063-T5
- CCT : 2700K/3000K/3500K/4000K/5000K/6500K



luxio
L I G H T I N G

www.luxio-lighting.com


Optical & electronic data

	200mm (0.66')	550mm (1.8')	1100mm (3.6')	1600mm (5.2')	1800mm (6')	2200mm (7.2')	L*(277*277mm) (1'1*1')	T*(529*277mm) (1.7'1*1')	X*(529*529mm) (1.7'1*1.7')
Round Grating 30°/50° 	/	11W / 850LM	22W / 1700LM	33W / 2550LM	/	44W / 3400LM	/	/	/


Remark:

- 1 the tolerance of output data can be vary up to 10%;
- 2 the output data is typical value;


Standard length

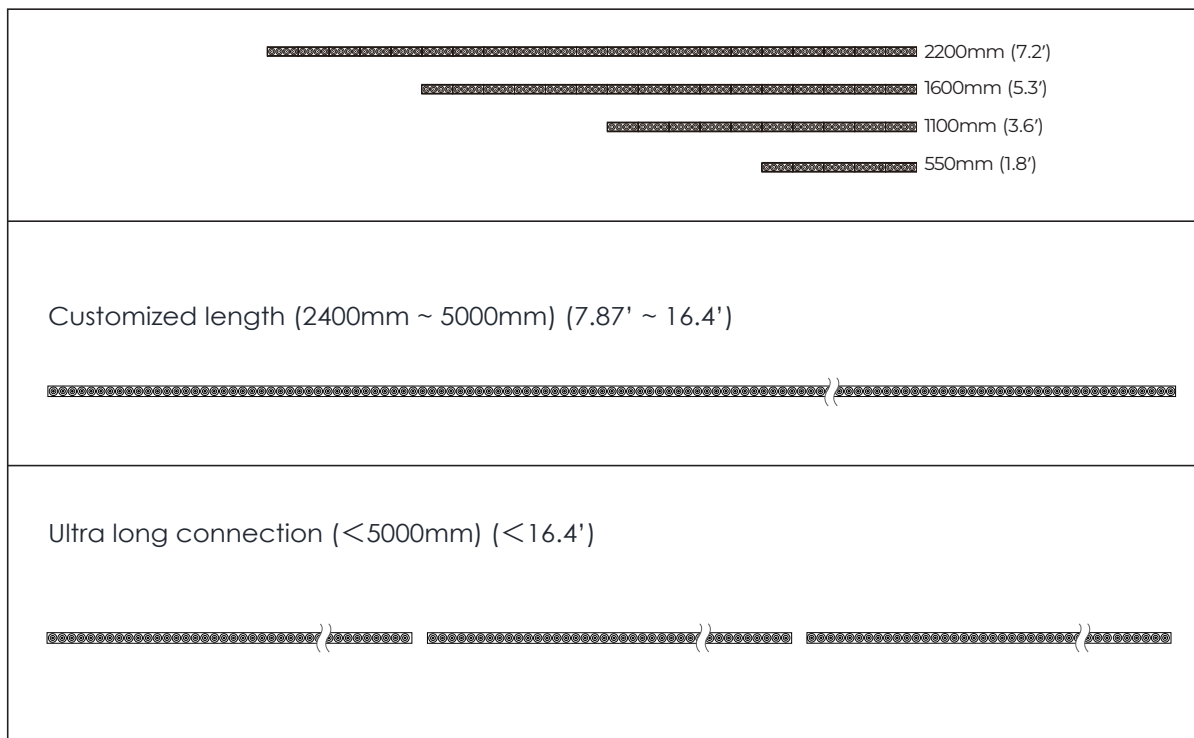


Dimensions

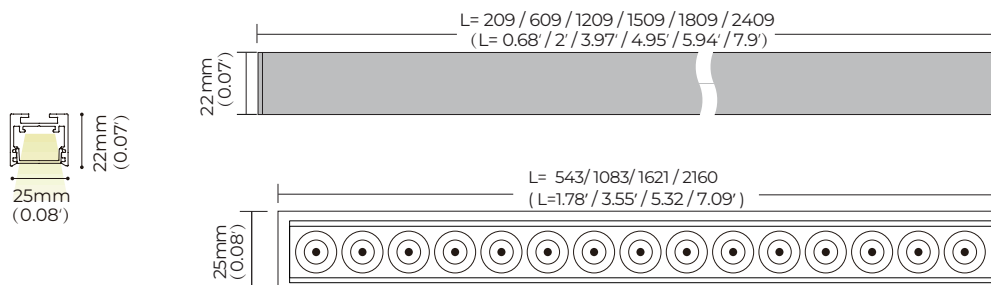


Corners

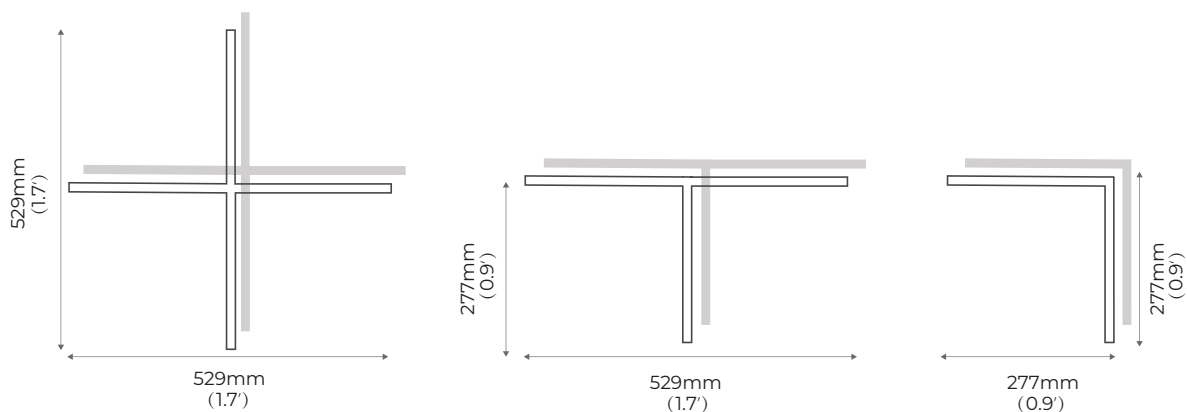

Lighting effect

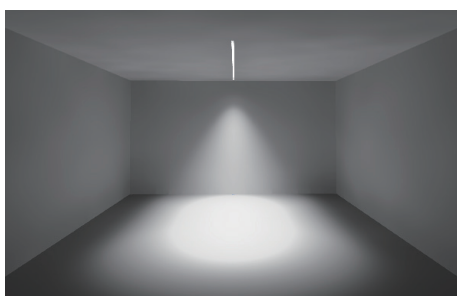

Round Grating 30°

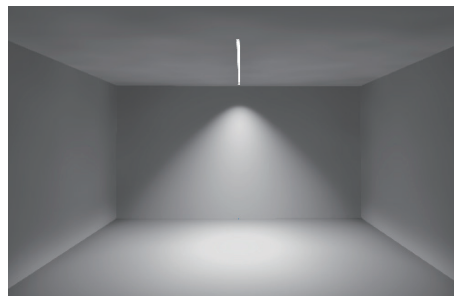

Round Grating 55°