

STREET LIGHT



LX-SL-01-G7(160)

IP	IK	CRI	AC100-277V	50000hrs
66	08	>70		

5 YEAR WARRANTY	LUMILEDS	SOSEN LED DRIVER	CE	CB	RoHS	IEC EN60598
------------------------------	-----------------	----------------------------	-----------	-----------	-------------	-----------------------

LED street light LX-SL-01-G7(160)

- Application : LED Street light widely used in Street road lighting, Highway, Pathway, Parking lot, Schools, Residential area, Villas, Resorts, Garden, Tunnel light and other exterior Landscape lighting.
- Housing Material : Alluminum alloy
- Color : Grey / Black / Bronze
- Easy Installation
- Operating Temp.: -40°C ~+50°C
- Operating Temp.: -40°C ~+80°C



luxio
L I G H T I N G

www.luxio-lighting.com

References

Reference	Lamp power	Luminous Efficacy	CCT/K	OPTICS	Weight
LX-SL-01-G7 (160)	30W	160lm/W	3000K/4000K/5000K /5700K	Type II-S(151°*81°) Type II-M(147°*72°) Type III-M(156°*71°) Type IV-M(100°*65°) Type V(150°)	2.75kg(6.06lbs)
	50W				3.50kg(7.72lbs)
	60W				
	80W				
	100W				5.20kg(11.5lbs)
	120W				
	150W				6.15kg(13.6lbs)
	200W				
	240W				

Order code : Reference - Power - Luminous flux - CCT/K - Optic

Important : All the specification can be customized as per the project request .

Model Options



30W/50W



60W/80W/100W




120W/150W




200W/240W


Dimensions(mm)




30W/50W



60W/80W/100W




120W/150W



200W/240W

Sensor Optional

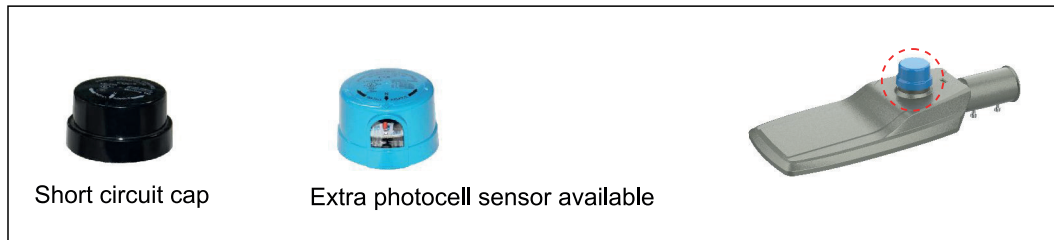

Installation and use

