

# STREET LIGHT



## LX-SL-01-G3B

<b>IP</b> 66	<b>IK</b> 08	<b>CRI</b> >70	<b>AC100-277V</b>
-----------------	-----------------	-------------------	-------------------

<b>5</b> YEAR WARRANTY	<b>LUMILEDS</b>	<b>Driver</b> <b>MW</b> MEAN WELL	<b>CE</b>	<b>CB</b>	<b>RoHS</b>	<b>IEC</b> EN60598	<b>50000hrs</b>
------------------------------	-----------------	---	-----------	-----------	-------------	-----------------------	-----------------

### LED street light LX-SL-01-G3B

- Application : Tunnel light, Sports field, Parking lot, Garden, Residential area, Landscape, Architectural decorative lighting, Roads and other places.
- Housing Material: Alluminum alloy
- Color : Grey / Black / Bronze
- Easy Installation
- Operating Temp.: -40°C ~+50°C
- Operating Temp.: -40°C ~+80°C



## References

Reference	Lamp power	Luminous Efficacy	CCT/K	OPTICS	Net Weight
LX-SL-01-G3B	30W	140lm/W	3000K/4000K/5000K /5700K	Type II-S(151*81°) Type II-M(147*72°) Type III-M(156*71°) Type IV-M(100*65°) Type V(150°)	5.0kg(11lbs)
	50W				
	60W				
	80W				7.0kg(15.4lbs)
	100W				
	120W				
	150W				8.5kg(18.7lbs)
	180W				
	200W				
	240W				

Order code : Reference - Power - Luminous flux - CCT/K - Optic

Important : All the specification can be customized as per the project request .

## Model Options



30W/50W/60W/80W




100W/120W/150W




180W/200W/240W


## Dimensions(mm)



30W/50W/60W/80W

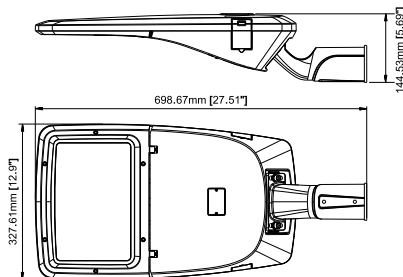


100W/120W/150W

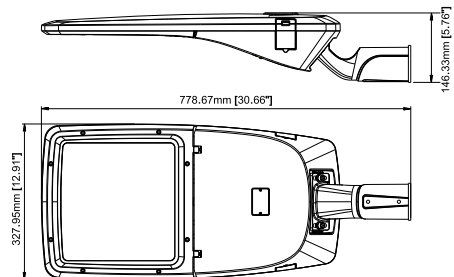

180W/200W/240W

## Sensor Optional

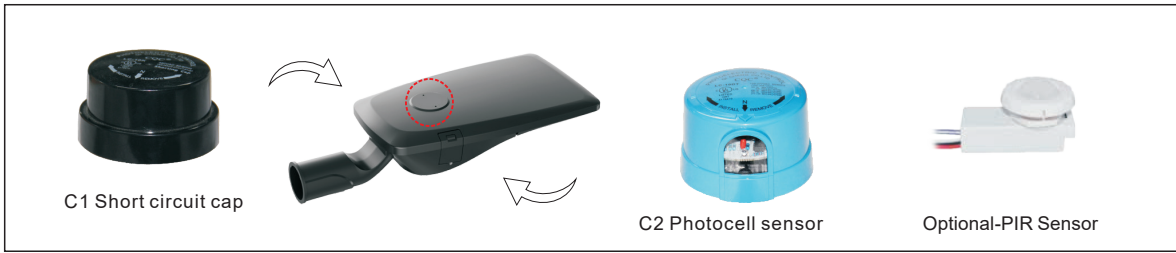

## Installation and use

