

SKYLINE





SKYLINE

DC24V	CRI >80	IP 20
-------	------------	----------



SKYLINE

- Connect two points to be one line, freely application across space.
- Multiple applications, such as direct, indirect lighting & wall washing lighting etc.
- Length between 6-20m max
- Patented design of fixed accessories, convenient and flexible installation.

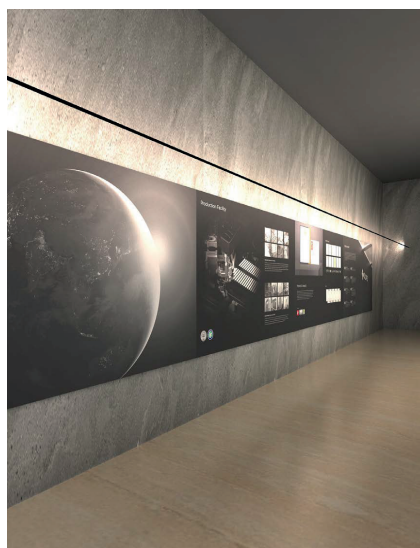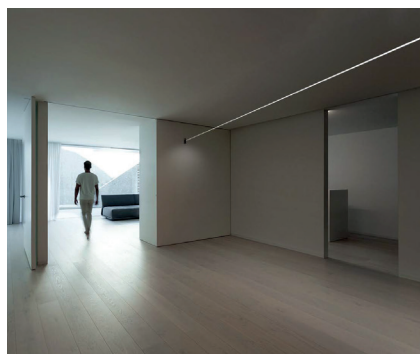


luxio
L I G H T I N G

www.luxio-lighting.com


References

Reference	Led Power	Input Voltage	Luminous flux	CCT/K	Dimensions
LX-NF-SKY06A	13.5W/m	DC24V	1320Lm/m	2700K/3000K/4000K/6000K	6000mm
LX-NF-SKY06B	10W/m		1000Lm/m		6000mm
LX-NF-SKY06D	10.6W/m		1100Lm/m		6000mm
LX-NF-SKY12C	8.7W/m		890Lm/m		12000mm
LX-NF-SKY20C	8.7W/m		890Lm/m		20000mm




Dimensions

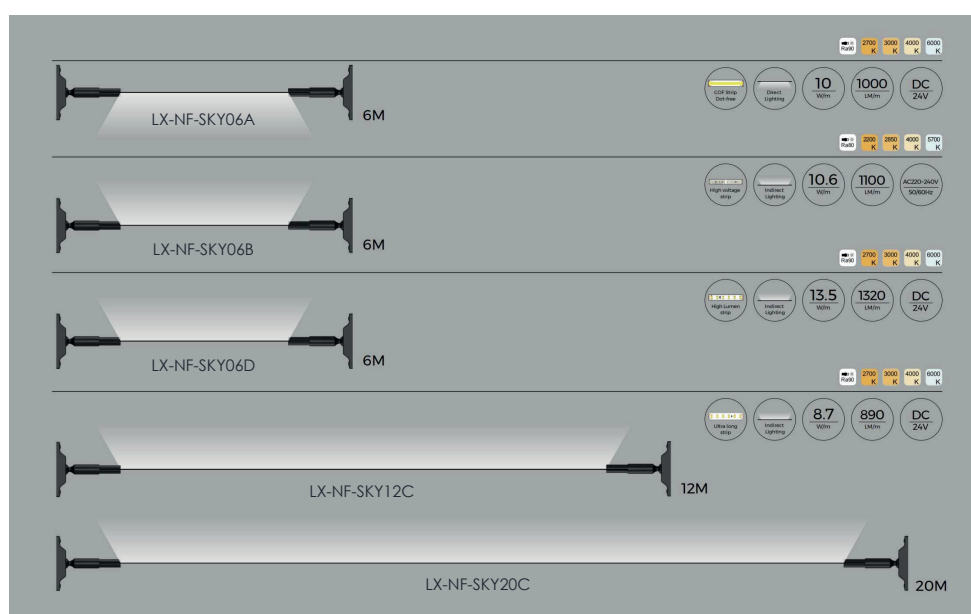

Fixings

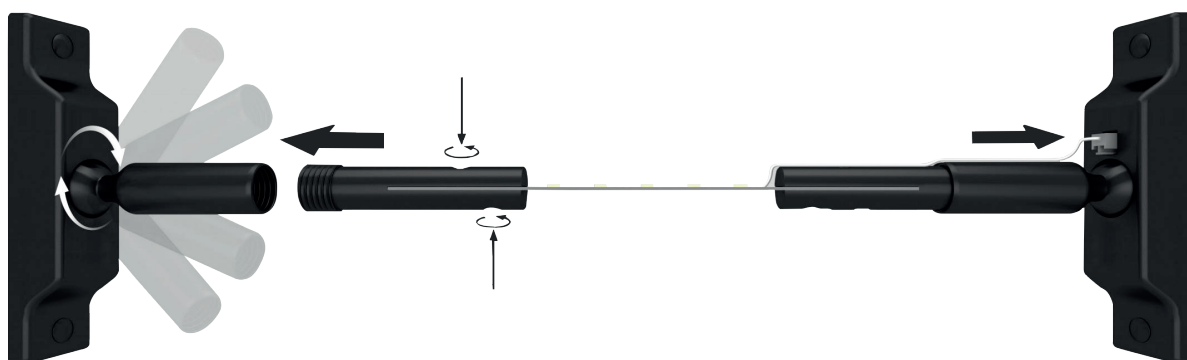

Application Guidelines

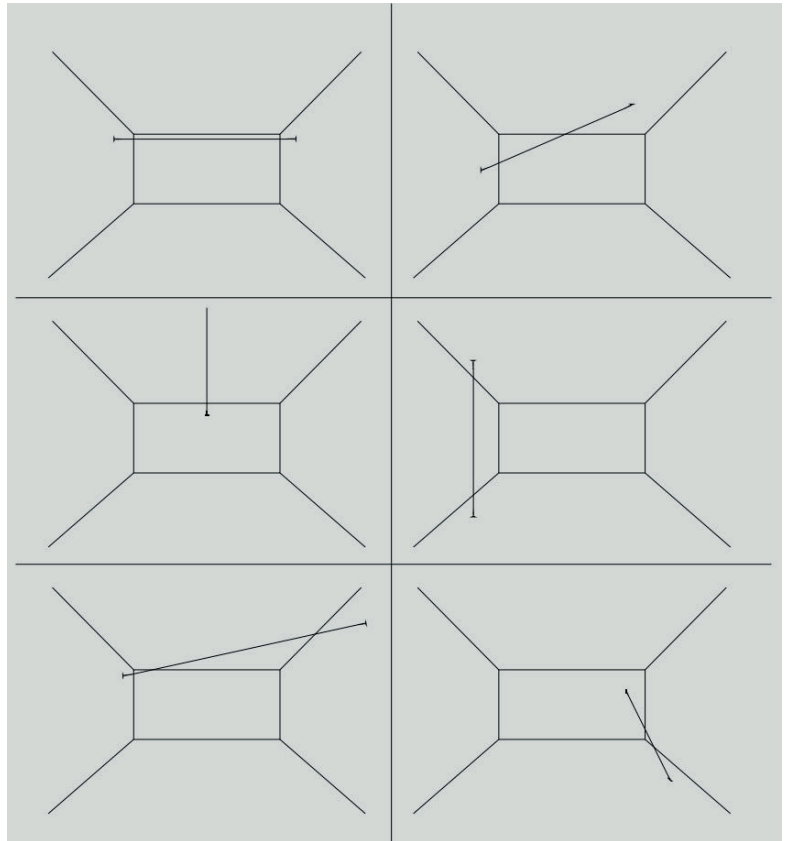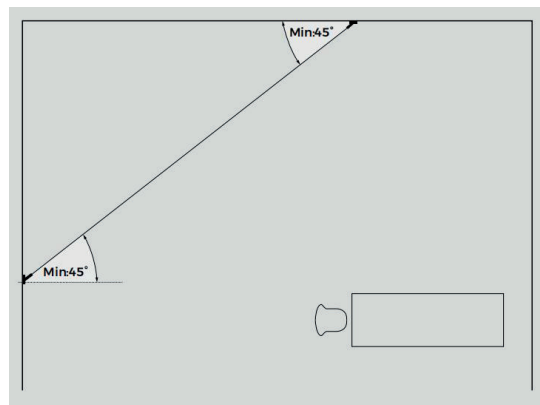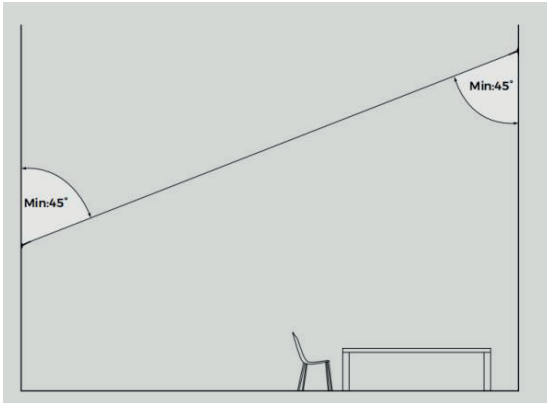

Installation Guidelines

