

FLOOD LIGHT



LX-FL-07-G17A

IP	AC100-277V	CRI
66		>70



CE	CB	RoHS	50000hrs
----	----	------	----------

Better solutions for Led Flood Light

Sports lighting, Stadium lighting, Sports fields, Car parkes, High mast installations Dock, railway and container yards, Ports and other large scale outdoor applications, Architectural lighting, Landscape lighting, Industrial and commercial exterior lighting Decorative lighting for holidays, tradeshow, exhibitions.

Operating Temperature : -40°C ~ +50°C

Storage Temperature : -40°C ~ +80°C

Leds : SAMSUNG 3535 SMD5050



luxio
L I G H T I N G

www.luxio-lighting.com


References

Reference	Led Power	Luminous flux	CCT/K	OPTICS	IP Rating	Weight
LX-FL-07-G17A	200W	120Lm/w 150Lm/w	3000K/4000K/5000K /5700K	10°/15°/20°/30°/40° /60°/90°/T2(117°34°)	IP66	7.6kg
	240W			10°/15°/20°/30°/40° /60°/90°/T2(117°34°)		7.6kg
	300W			15°/20°/30°/60°/90°/ T2(117°34°)		7.6kg
	400W			10°/15°/20°/30°/40° /60°/90°/T2(117°34°)		16.5kg
	500W			10°/15°/20°/30°/40° /60°/90°/T2(117°34°)		16.5kg
	600W			15°/20°/30°/60°/90°/ T2(117°34°)		16.5kg
	750W			10°/15°/20°/30°/40° /60°/90°/T2(117°34°)		23.0kg
	900W			15°/20°/30°/60°/90°/ T2(117°34°)		23.0kg
	1000W			10°/15°/20°/30°/40° /60°/90°/T2(117°34°)		29.0kg
	1200W			15°/20°/30°/60°/90°/ T2(117°34°)		29.0kg
	1500W			15°/20°/30°/60°/90°/ T2(117°34°)		35.3kg
	1800W			15°/20°/30°/60°/90°/ T2(117°34°)		41.6kg

Order code : Reference - Power - Luminous flux - CCT/K - Optic

Important : All the specification can be customized as per the project request .

Dimensions(mm)

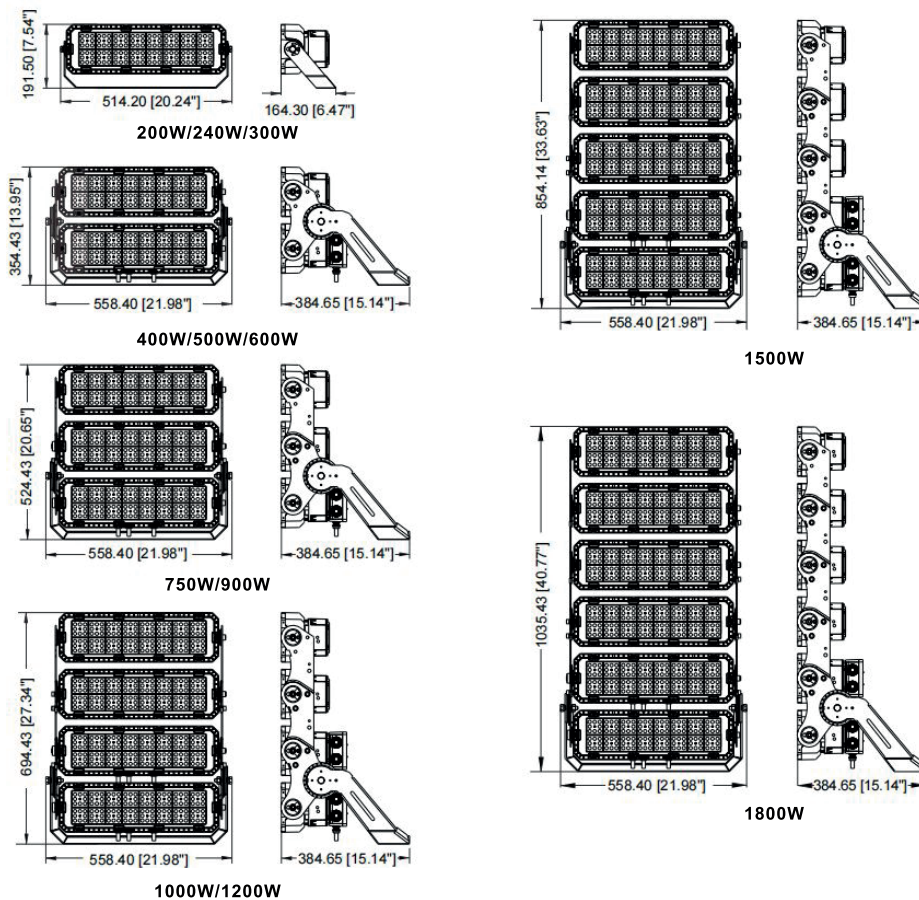

Model Options



200W/240W/300W

400W/500W/600W

750W/900W

1000W/1200W

1500W

1800W


Installation and use

Remarks	Brown/Black -- L Blue/White --- N G/Y ----- GND	Caution :Vertical installation is absolutely not permitted.	Caution :When the angle of the luminous surface exceeds 90°,the lamp power is reduced by 20%.
----------------	--	---	---

01



02




Power	D1	D2	L1	L2	L3
300W	17mm	12.5mm	270mm	30mm	
600W-1800W	22mm	17mm	330mm	50mm	120mm

03



04



05

