


STRIP LED

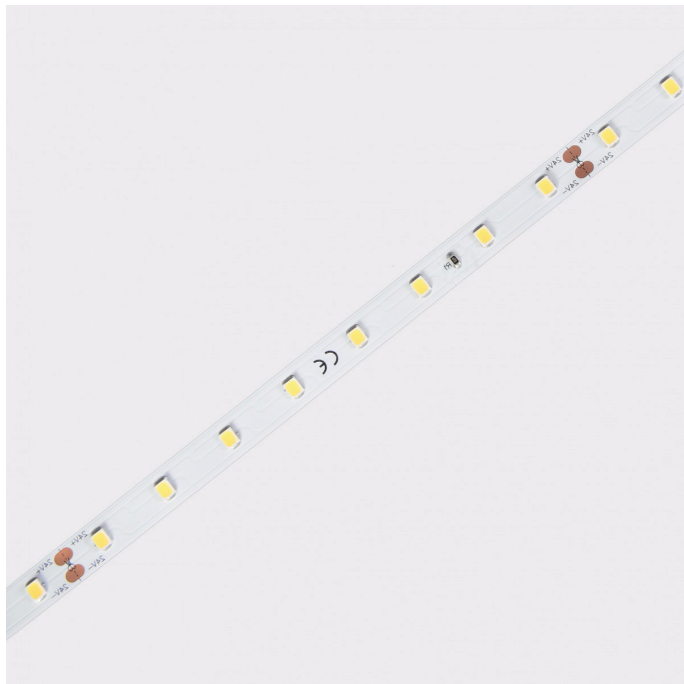

LX-ST-D864-24V-8mm

IP
20/55/65/67/68

CRI
80/90/95

DC24V



STRIP LED

High cost performance

High density lamp, more uniform light

Self-encapsulated design offers 4 optional 2700-6500K white lights

Mounting : 3M tape

Luminance efficiency Max up to 220LM/W

Ta: -25~40°C ; Tc : 75°C (max)





luxio
L I G H T I N G

www.luxio-lighting.com

References

Reference	Led Power	Max Power	Luminous flux	CRI	CCT/K	IP Rating	Dimensions
LX-ST-D864-24V-8mm	4.3W(1m) / 18W(5m)	4.8W(1m)	510Lm/m	RA>80	1900K	IP20/IP55/IP65 /IP67/IP68	5000*8*1.5mm
			570Lm/m		2300K		
			620Lm/m		2700K		
			650Lm/m		3000K		
			660Lm/m		3500K		
			680Lm/m		4000K		
			680Lm/m		5000K		
			650Lm/m		6000K		
			420Lm/m	RA>90	1900K		
			470Lm/m		2300K		
			510Lm/m		2700K		
			540Lm/m		3000K		
			545Lm/m		3500K		
			560Lm/m		4000K		
			560Lm/m		5000K		
			540Lm/m		6000K		
			415Lm/m	RA>95	1900K		
			460Lm/m		2300K		
			495Lm/m		2700K		
			520Lm/m		3000K		
			530Lm/m		3500K		
			545Lm/m		4000K		
			545Lm/m		5000K		
			410Lm/m	—	525nm		
			85Lm/m		470nm		

Dimensions

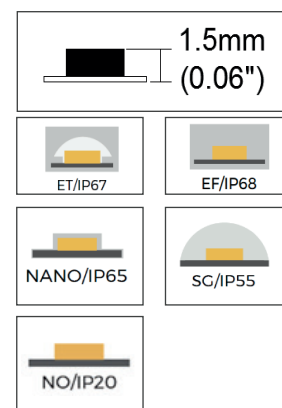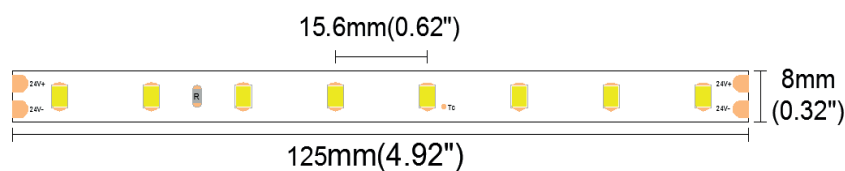

www.luxio-lighting.com

Accessories Information

Name	Picture		Code	description
Connector for wire and FPC			LX-42-620800001	8mm width, 2PIN connector of wire and FPC,suitable for white color strip, NO/NA,2PIN wire 18- 22AWG
Connector for FPC and FPC			LX-42-620800002	8mm width, 2PIN connector of FPC and FPC,suitable for white color strip,NO/NA
Connector for wire and FPC			LX-03-00-0044	8mm width, 2PIN connector of wire and FPC,suitable for white color and gel coating strip,SG, 2PIN wire 18- 22AWG
Connector for FPC and FPC			LX-03-00-0048	8mm width, 2PIN connector of FPC and FPC,suitable for white color and gel coating strip, SG
Slim connector			LX-03-00-0065	TSC-8-2, suitable for 8mm fpc to fpc connection , IP20, 2pin, 10pcs per bag
FPC with wire			LX-03-00-0066	wire connection when using together with TSC-8-2,IP20,2PIN, 10PCS per bag
Fixed Clip			LX-02-00-0002	Silicone clip, screw: PA 3*8mm, suitable for 8mm FPC,EH/EF/ET strip
Fixed Clip			LX-02-00-0017	transparent, 3*8mm self-tapping screws, suitable for 10mm FPC, NO/NA LED strip
Fixed Clip			LX-02-00-0015	Fixed clip, transparent, 3*8mm self-tapping screws, suitable for 10mm FPC, SG LED strip
Silicone end cap set			LX-02-00-0021	Silicone end cap set, including end cap and plug, suitable for 10mm FPC,EH/ET/EF silicone extrusion strip
Mounting groove			LX-02-00-0024	Transparent PVC mounting groove,suitable for 10mm FPC,silicone extruded EF/ET strip
Stopper glue			LX-16-03010001	Silicone gel, suitable for ST/ET/EH/EF/SF waterproof LED strip