


STRIP LED



LX-ST-DPS4RGBW-24V-10mm

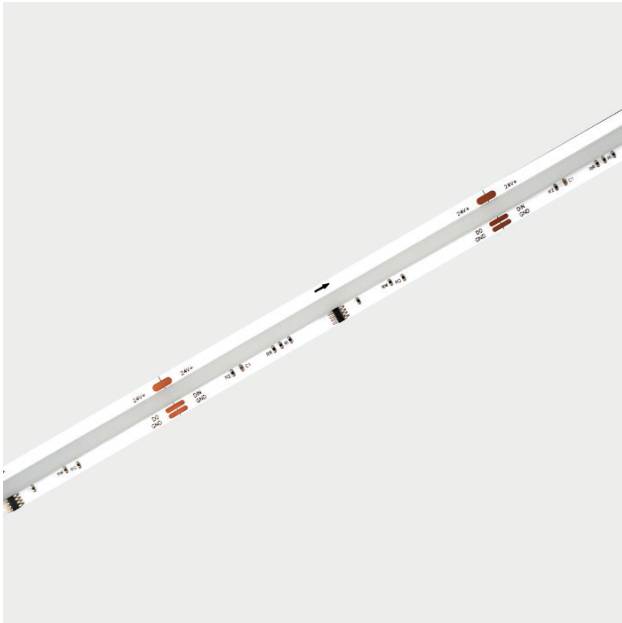

- 12 Pixels/m, RGBW water lamp belt
- Can be used with a simple controller
- Stronger Anti-bending Resistance
- Ta: -20~40° C ; Tc=75° (max)
- Rated current : 0.75A(1m)
- On-off times: 10000 (test times)
- Max.length : 5000mm(16.4')
- Cutting unit : 83.33mm(3.28")
- Min. bend diameter : Φ 60mm(2.36")
- Mounting : 3M tape
- Copper foil: 2oz



luxio
L I G H T I N G


www.luxio-lighting.com

References

Reference	Typical Power	Max Power	Luminous flux/m	CRI	Color	CCT	IP Rating	Dimensions
LX-ST-DPS4RGBW-24V-10mm	16.2~19.8W/(1m)	19.8W(1m)	105lm	/	R	620-630nm	IP20/IP65	5000*10*1.6mm
			345lm		G	520-530nm		
			60lm		B	450-460nm		
			300lm		WW	3000K		
			790lm		RGBWW	RGB		

- 1.The tolerance of output data can be vary up to 15%.
- 2.the output data tested according to IES TM-30-15.
- 3.the output data is based on IP20/1mterter, data of 5m in only for reference.
- 4.IP protection process leads changes to size, CCT and luminous flux.
5. IC:WS2811F

Dimensions

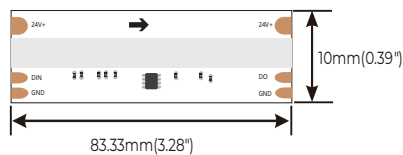

Electronic & output data

IP Process	Picture	Picture description	Size	Optional CCT/color for finished product	Lumen output rate
NO		No proof	10mm*1.6mm	RGB+2700K/3000K/4000K/6500K	100%
NA		Nano-proof	10mm*1.6mm	RGB+2700K/3000K/4000K/6500K	98%

Precautions

Please drive the led strip with 24VDC isolated power, and the ripple of the constant voltage source should be less than 5%.

- Please do not bend the strip into an arc with a diameter less than 60mm to ensure the longevity and reliability.
- Do not fold it in case any damage of LED beads.
- Do not pull the power wire hard to ensure the longevity. Any Crash may damage the LED light is prohibited.
- Please make sure the wire is connected to the anode and cathode correctly. The power output should be consistent with the voltage of the strip to avoid damage.
- LED lights should be stored in dry, sealed environment. Please only unpack it before usage. Ambient temperature: -25°C~40°C
- Storage temperature: 0°C~60°C. Please use the strips without waterproof within indoor environment with humidity less than 70%.
- Please be careful during operation. Do not touch the AC power supply in case of electric shock.
- Please leave at least 20% power for the power supply during using to ensure there is enough power supply to drive the product.
- Do not use any acid or alkaline adhesives to fix the product (e.g.: glass cement).
- Do not scratch the product when IP process of the product is NA. Ultraviolet rays will damage the nano-layers on the product and seriously affect the life of the product.